



Mortise

MORTISE LOCKS



RE Series

- Heavy duty mortise lock, wrought steel, corrosion resistant
 - UL listed 3-hour fire rating
 - Meet or exceed ANSI Grade 1 standards
 - Field reversible handing
 - Anti-saw deadbolts with hardened pins
 - Limited Lifetime Warranty
- Easy installation and servicing
- Forged brass or stainless steel escutcheon
- 7 Solid-touch grip levers and 1 knob available
 - Levers made of forged brass or stainless steel
 - Grade 1 knob with steel insert
 - Available in 7 BHMA finishes - 605, 606, 613, 625, 626, 629, 630
 - Levers ADA compliant



RW Series



RS Series

Mortise Locks and Retrofit Trims Available




Artistic **A**



Congress **C**



Gala **G (#16)**



Imperial **I**



Quest **Q (#14)**



Regal **R**



Sentinel **S (#15)**





Tango **T**

Features And Specifications


- For Doors 1 3/4" thick.
- Backset 2 3/4".
- Lockcase Heavy gauge steel 8" x 1 1/4" x 3/32".
Accommodates flat doors & doors beveled 1/8" in 2".
- Armored Front Wrought brass or stainless steel attached by machine screws to lockcase front.
- Deadbolt 1" throw, brass, chrome plated with hardened steel rollers.
- Latchbolt Stainless steel latch and anti-friction insert.
- Guardbolt Extruded brass, chrome plated.
- Stopworks Push button, brass, chrome plated.
- Strike Brass, bronze, or stainless steel, 4 7/8" x 1 1/4" Lipped ANSI strike.
- Hand Handed. Reversible in field.
- Trim As specified.
- Cylinder As specified.
- Keyway As specified.
- Finishes As specified.
- Ⓛ Listings Ⓛ Listed "A" Label (3 hour), for use on fire doors: single or pairs.
- ANSI Meets dimensional and Grade 1 Operational and Grade 1 Security Specifications of ANSI A156.13-2005 Series 1000. Lock body conforms to Federal specification Type 86.



ANSI STRIKE





FRONT

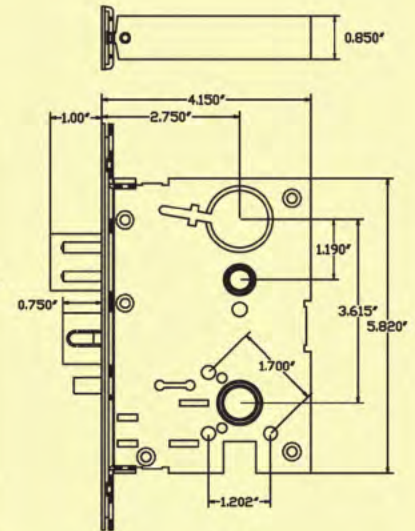


CASE

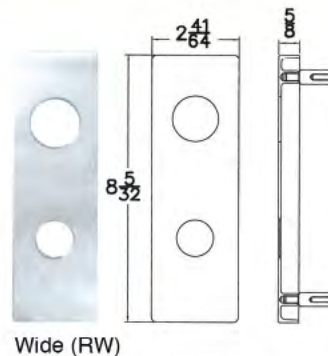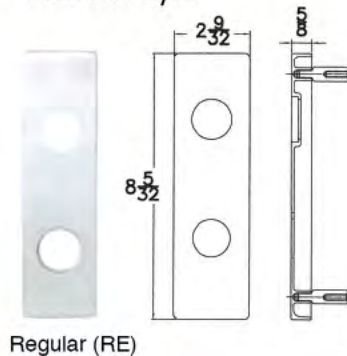Escutcheon Styles



Sectional Rose Style



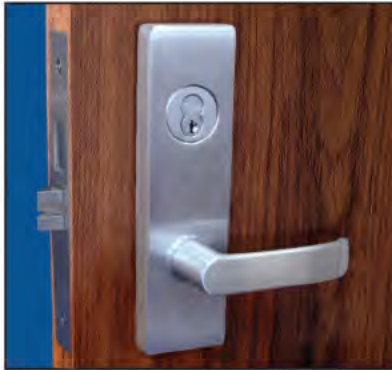

RCE Series - Escutcheon Trim



RCS Series - Sectional Trim








MORTISE LOCKS WITH CLUTCHING MECHANISM

- Free turning lever or knob in the locked position
- Vandal resistant clutching mechanism in outside trim assembly
- Ideally suited for hospitals, schools, universities, factories, offices and other areas requiring more security
- Top quality, added security
- Wrought rose or escutcheon made of brass or stainless steel
- Tamper-proof cylinder collars
- Available with interchangeable core and standard cylinder
- 7 Solid-touch grip levers and 1 knob available
 - Levers made of forged brass or stainless steel
 - Knob with steel insert
 - Available in 7 BHMA finishes - 605, 606, 613, 625, 626, 629 and 630
- Heavy duty mortise lock
 - UL listed 3-hour fire rating
 - ANSI Grade 1
 - Heavy duty stopworks
 - Anti-saw deadbolts with hardened pins
- Limited Lifetime Warranty

Specifications for R-Series

Functions*








*Clutch levers rotate up and down freely in the locked or unlocked positions

Outside	Inside	Series/ Function	Type	ANSI No.	Function Description
	RS-01 RE-01 RW-01 RSC-01 REC-01 RWC-01	Passage or Closet	F01	Latch bolt operated by lever from either side at all times.	
	RS-02 RE-02 RW-02 RSC-02 REC-02 RWC-02	Privacy or Bathroom	F02	Latch bolt operated by lever from either side. Dead bolt operated by turn from inside and emergency release from outside.	
	RS-04 RE-04 RW-04 RSC-04 REC-04 RWC-04	Entry/ Office	F04	Latch bolt operated by lever from either side, except when outside lever is made inoperative by a stop or mechanical means other than key. When outside lever is locked, latch bolt is retracted by key from outside or by operating inside lever. ***Auxiliary dead bolt latch.	
	RS-05 RE-05 RW-05 RSC-05 REC-05 RWC-05	Classroom	F05	Latch bolt operated by lever from either side, except when outside lever is locked from outside by key. When outside lever is locked, latch bolt may be retracted by key, or by operating key and outside lever from outside or by operating inside lever. ***Auxiliary dead bolt latch.	
	RS-06 RE-06 RW-06	Holdback	F06	Latch bolt operated by lever either side, except when outside lever is locked from outside by key. Latch bolt can be locked in a retracted position by key. When outside lever is locked, latch bolt is retracted by key from outside or by operating inside lever unless latch bolt has been locked in a retracted position. ***Auxiliary dead bolt latch.	
	RS-07 RE-07 RW-07 RSC-07 REC-07 RWC-07	Storeroom or Closet	F07	Latch bolt operated by key from outside or by rotating inside lever. Outside lever is always inoperative. ***Auxiliary dead bolt latch.	
	RS-08 RE-08 RW-08 RSC-08 REC-08 RWC-08	Front Door or Corridor Lock	F08	Latch bolt is operated by lever from either side, except when outside lever is made inoperative by buttons in face. Dead bolt is operated by turn inside. Key outside operates both bolts. Outside lever is unlocked by button on face.	

Specifications for R-Series

Functions*








*Clutch levers rotate up and down freely in the locked or unlocked positions

Outside	Inside	Series/ Function	Type	ANSI No.	Function Description
		RS-09 RE-09 RW-09	Apartment / Exit or Public Toilet	F09	Latch bolt operated by lever from either side, except when outside lever is locked by key from inside. When outside lever is locked, latch bolt is retracted by key from outside or by operating inside lever. ***Auxiliary dead bolt latch
		RS-11 RE-11 RW-11	Dormitory or Exit Lock	F11	Latch bolt operated by lever from either side except when outside lever is made inoperative by a stop or mechanical means other than key. Dead bolt projected by key from either side. Dead bolt retracted by key from outside. Both bolts retracted by inside lever and outside remain locked.
		RS-12 RE-12 RW-12 RSC-12 REC-12 RWC-12	Dormitory or Exit	F12	Latch bolt operated by lever from either side, except when outside lever is made inoperative by a stop or mechanical means other than key. Dead bolt projected by key from outside and by turn from inside. Deadbolt retracted by key from outside and by turn from inside. Operating inside lever retracts both bolts and outside remains locked.
		RS-13 RE-13 RW-13 RSC-13 REC-13 RWC-13	Dormitory or Exit	F13	Latch bolt operated by lever from either side. Dead bolt projected by key from outside and thumb turn from inside. Operating inside lever retracts both bolts and unlocks outside.
		RS-14 RE-14 RW-14 RSC-14 REC-14 RWC-14	Storeroom	F14	Latch bolt operated by lever from either side. Dead bolt operated by key from either side.
		RS-15 RE-15 RW-15 RSC-15 REC-15 RWC-15	Hotel or Motel	F15	<i>This function will operate only with Schlage® core.</i> Latch bolt operated by key from outside or by rotating inside lever. Outside lever is always inoperative. Dead bolt operated by thumb turn from inside and all keys except emergency and display key are shut out. Operating inside lever retracts both bolts. ***Auxillary dead bolt latch.
		RS-16 RE-16 RW-16	Deadlock	F16	Dead bolt operated by key on either side.

Specifications for R-Series

Functions*








*Clutch levers rotate up and down freely in the locked or unlocked positions

Outside	Inside	Series/ Function	Type	ANSI No.	Function Description
		RS-17 RE-17 RW-17	Deadlock	F17	Dead bolt operated by key outside and turn piece inside.
		RS-18 RE-18 RW-18	Deadlock	F18	Dead bolt by key from outside only.
		RS-19 RE-19 RW-19 RSC-19 REC-19 RWC-19	Privacy or Bathroom	F19	Latch bolt operated by lever from either side. Dead bolt operated by turn from inside and emergency release from outside. Operating inside lever retracts both bolts.
		RS-20 RE-20 RW-20 RSC-20 REC-20 RWC-20	Entrance/ Apartment/ Dormitory	F20	Latch bolt operated by lever from either side, except when outside lever is made inoperative by push button rocker. Dead bolt projected by key from outside and by thumb turn from inside. Key outside operates both bolts. Operating inside lever retracts both bolts and outside remains locked. Latch bolt is deadlocked when outside lever is made inoperative or when the dead bolt is projected. When dead bolt is retracted, lever is unlocked by stop or mechanical means other than key.
		RS-21 RE-21 RW-21	Dormitory with Dead bolt	F21	Latch bolt operated by lever either side. Dead bolt operated by key outside or by turn from inside.
		RS-22 RE-22 RW-22 RSC-22 REC-22 RWC-22	Privacy	F22	Latch bolt operated by lever from either side, except when outside lever is locked by inside turn. Operating inside lever, closing door or operating outside emergency release unlocks outside lever.
		RSC-26 REC-26 RWC-26	Institutional Privacy	F26	Latch bolt operated by lever from either side except when outside lever is locked by lever inside. Latch bolt by key outside with override of lever inside when manually held in locked position. Operating inside lever or closing door unlocks outside lever. ***Auxiliary dead latch.

Specifications for R-Series

Functions*








*Clutch levers rotate up and down freely in the locked or unlocked positions

Outside	Inside	Series/ Function	Type	ANSI No.	Function Description
		RS-29 RE-29 RW-29 RSC-29 REC-29 RWC-29	Classroom Dead bolt	F29	Key from outside operates dead bolt. Turn from inside retracts but does not project dead bolt.
		RS-30 RE-30 RW-30 RSC-30 REC-30 RWC-30	Institutional	F30	Latch bolt operated by key either side. Both levers always inoperative. ***Auxiliary dead bolt latch.
		RS-31 RE-31 RW-31	Exit	F31	Latch bolt operated by lever from inside. Non removable blank lever or no lever outside. ***Auxiliary dead bolt latch.
		RS-32 RE-32 RW-32 RSC-32 REC-32 RWC-32	Intruder Latch bolt	F32	Latch bolt operated by lever either side, except when outside lever is locked from inside or outside by key. When outside lever is locked, latch bolt is retracted by key from inside or outside or by operating inside lever. ***Auxiliary dead bolt latch
		RS-33 RE-33 RW-33 RSC-33 REC-33 RWC-33	Intruder Dead bolt	F33	Latch bolt operated by lever either side, except when outside lever is locked from inside or outside by key. Dead bolt operated by key either side. Inside lever retracts both bolts and unlocks outside lever.
		RS-34 RE-34 RW-34 RSC-34 REC-34 RWC-34	Intruder Dead bolt	F34	Latch bolt operated by lever either side, except when outside lever is locked from inside or outside by key. Dead bolt operated by key either side. Operating inside lever retracts both bolts and unlocks outside. *** Auxiliary dead latch or latch bolt dead locked when dead bolt is thrown.
		RS-35 RE-35 RW-35 RSC-35 REC-35 RWC-35	Storeroom with Dead bolt	F35	Latch bolt operated by lever from either side, except when outside lever is made inoperative by a stop or mechanical means other than key. Dead bolt operated by key from either side.

Specifications for R-Series

Functions*

*Clutch levers rotate up and down freely in the locked or unlocked positions






Outside	Inside	Series/ Function	Type	ANSI No.	Function Description
		RS-41 RE-41 RW-41	Single Dummy		No Lock works, Lever one side only.
		RS-42 RE-42 RW-42	Double Dummy		No Lock works, Lever on both sides.
		RS-82 RE-82 RW-82	Storeroom with double cylinder		Latch bolt operated by lever from either side. Both levers always rigid. ***Auxiliary dead bolt latch.
		RS-AT RE-AT RW-AT	Office		Latch bolt operated by lever from either side, except when outside lever is made inoperable by turn on inside or key from outside. Outside lever is unlocked by turn from inside or key from outside. Key will retract latch. Inside lever is always operable. Auxiliary dead bolt latch.
		RS-LT RE-LT RW-LT	Privacy		Latch bolt operated by lever from either side, except when outside lever is made inoperable by turn on inside. Outside lever is unlocked by rotating inside lever, turn from inside or emergency key from outside. Inside lever is always operable.
		RS-TA RE-TA RW-TA	Dormitory		Latch bolt operated by lever from either side, except when outside lever is made inoperable by a stop or mechanical means other than a key or projecting the deadbolt. Dead bolt operated by key from outside and by turn from inside. Key from outside will retract the dead bolt and the latch. Operating inside lever retracts both bolts and outside remains locked.
		RS-TD RE-TD RW-TD	Dormitory		Latch bolt operated by lever from inside or turning key from outside. Outside lever is always inoperable. Dead bolt operated by key from outside and by turn from inside. Operating inside lever retracts both bolts.

Electrified Mortise Locks

Features:




- Designed to handle single opening, stand alone applications or can be readily integrated into sophisticated access control systems.
- Meets ANSI A156.13 Grade 1 requirements
- UL listed 3-hour fire rating
- 24VDC voltage standard, 12VDC upon request
- Handing field reversible
- 3 Monitoring capabilities: Request to exit, Door position status, and Latch position status
- For new or retrofit applications

Electrified Functions

Outside	Inside	Series/ Function	Type	ANSI No.	Function Description
		RES-5921 REE-5921	24VDC Fail Safe 3-position monitoring	N/A	24VDC. Fail safe. Monitors Request-to-Exit. Door Position Status and latch position status. Latch bolt is operated by lever from either side when no power is supplied. Powering unit locks outside lever. When locked, the latch bolt can be retracted by key. Auxillary latch bolt.
		RES-5921-DB REE-5921-DB	24VDC Fail Safe Dead Bolt RQE	N/A	24VDC voltage. Fail safe, with dead bolt. Monitors Request-to-Exit. Latch bolt is operated by lever from either side when no power is supplied. Powering unit locks outside lever. Dead bolt can be operated from outside with key and inside by thumb turn. When locked, the latch bolt can be retracted by key. Rotating inside lever retracts both bolts. Auxillary latch bolt.
		RES-5922 REE-5922	24VDC Fail Safe 3-position monitoring	N/A	24VDC. Fail safe. Monitors Request-to-Exit. Door Position Status and latch position status. Latch bolt is operated by lever from either side when no power is supplied. Powering unit locks outside lever. When locked, the latch bolt can be retracted by key. Auxillary latch bolt.
		RES-5922-DB REE-5922-DB	24VDC Fail Safe Dead Bolt RQE	N/A	24VDC voltage. Fail safe, with dead bolt. Monitors Request-to-Exit. Latch bolt is operated by lever from either side when no power is supplied. Powering unit locks outside lever. Dead bolt can be operated from inside and outside with key. When locked, the latch bolt can be retracted by key. Rotating inside lever retracts both bolts. Auxillary latch bolt.
		RES-5931 REE-5931	24VDC Fail Secure 3-position monitoring	N/A	24VDC voltage. Fail secure. Monitors Request-to-Exit. Door Position Status and Latch Position Status. Powered unit latch bolt is operated by lever from either side. When no power is supplied outside lever is locked. When locked, the latch bolt can be retracted by key. Auxillary latch bolt.

Electrified Mortise Locks

Electrified Functions


Outside	Inside	Series/ Function	Type	ANSI No.	Function Description
		RES-5931-DB REE-5931-DB	24VDC Fail Secure Dead Bolt RQE	N/A	24VDC voltage, fail secure, with Dead Bolt, Monitors Request-to-Exit. Powered unit latch bolt is operated by lever from either side. When no power is applied outside lever is locked. Dead bolt can be operated from outside with key and inside by thumb turn. When locked, latch bolt can be retracted by key. Rotating inside lever retracts both bolts. Auxiliary latch bolt.
		RES-5932 REE-5932	24VDC Fail Secure 3-position monitoring	N/A	24VDC. Fail secure. Monitors request to exit. Door position status and latch position status. When locked, the latch bolt can be retracted by key. Auxiliary latch bolt Powered unit latch bolt is operated by lever from either side. When no power is applied outside lever is locked.
		RES-5932-DB REE-5932-DB	24VDC Fail Secure Dead Bolt RQE	N/A	24VDC voltage, fail secure, with Dead Bolt, Monitors Request-to-Exit. Powered unit latch bolt is operated by lever from either side. When no power is applied outside lever is locked. Dead bolt can be operated from inside and outside with key. When locked, the latch bolt can be retracted by key. Rotating inside lever retracts both bolts. Auxiliary latch bolt.

HOW TO ORDER — MORTISE LOCKS

Series	Function	Trim	Finish	Hand	Options
RS	05	S	626	RH	
RE - Regular Escutcheon	See Function Chart	A - Artistic Lever	605	RH - Right Hand	SCH - Cylinder Accepts Schlage® Large Format Interchangeable Core
RW - Wide Escutcheon		C - Congress Lever	606	LH - Left Hand	
RS - Sectional		G - Gala Lever	613	RHR - Right Hand Reverse	
REC - Regular Escutcheon - Clutching Mechanism		I - Imperial Lever	625	LHR - Left Hand Reverse	
RSC - Sectional - Clutching Mechanism		R - *Regal Knob	626		
RWC - Regular Escutcheon - Clutching Mechanism		*Not available in 612 or 613	629		
RES - Regular Electrified Sectional		Q - Quest Lever	630		
REE - Regular Electrified Escutcheon		S - Sentinel Lever			
	T - Tango Lever				

Finishes —

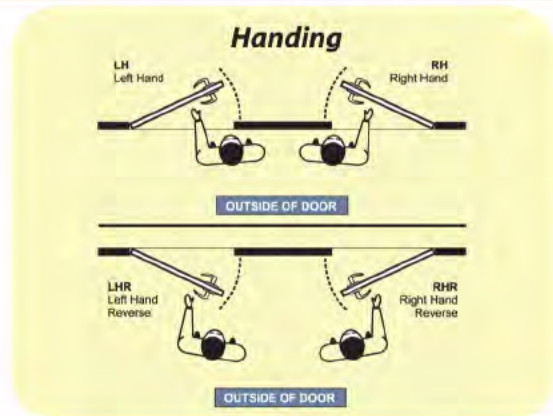- 605 - US3/Bright Brass
- 606 - US4/Satin Brass
- 613 - US10B/Oil Rubbed Bronze
- 625 - US26/Bright Chrome
- 626 - US26D/Satin Chrome
- 629 - US32/Bright Stainless
- 630 - US32D/Satin Stainless





Push Pull MORTISE LOCKSET



Features

- Heavy duty stainless steel trim
- Five Mounting Position Capability:
 - Handles down
 - Handles up
 - Pull handle up, push handle down
 - Pull handle down, push handle up
 - Handles point away from latch (horizontal mounting)
- Available with RS Series heavy-duty mechanical or electrified mortise lock
- Short throw angle, allowing easy push or pull action
- ANSI/BHMA Certified Grade 1
- UL/ULC listed for 3-hour rating

Code Compliance

- ANSI/BHMA: ANSI A 156.13-2005 Certified
- UL: UL listed 3-hour fire rating
- BAA: Meets guideline of the Buy American Act
- ADA: Meets requirements of the Americans with Disabilities Act



Specification

Applications	For hospitals, clinic offices and other institutions
Door type	Solid core wood or hollow metal
Stile width	4-1/2" minimum
Door thickness	1-3/4" standard, other available upon request
Backset	2-3/4"
Handle	Stainless steel, 2-3/4" projection
Cover	Stainless steel, 3"x 2-3/4" projection
Deadbolt	Stainless steel, with anti-saw hardened pins, 1" throw
Latchbolt	Stainless steel, split, anti-friction, 3/4" projection
Guardbolt	Stainless steel
Faceplate	Stainless steel, 1-1/4" wide standard, 1-1/8" optional
Stop button	Stainless steel, rocker type
Thumbturn	Stainless steel, classic standard
Cylinder collar	Stainless steel, tamper resistant
Cylinder	Small Format Interchangeable Core standard Schlage "C" optional
Handing	Non-handed, easily field reversible
Functions	Refer to pages 5-11
Finish	630
Warranty	10-year manufacturer's limited

Options

E-Electrified mortise lock chassis	Voltage: 12VDC or 24 VDC Handing: Non handed, easily field reversible Monitoring Capability: Request for exit, Key override and Privacy Functions: Refer to pages 10-11 UL: UL listed 3-hour fire rating ANSI/BHMA: A156.13-2005 Grade 1 Certified
EG	Engraved handles "PUSH" and "PULL"
L	Lead lined on mortise case
TRS	Tamper resistant exposure screws
N	1-1/8" wide faceplate
Door thickness	1-3/8", 2", 2-1/2", 3", 5"
Thumbturn	CC—Classic Conceal type ADA—ADA thumbturn
Cylinder	SFIC: Small Format Interchangeable Core standard Schlage "C" optional



Important Notes

- Cylinder Operation** — Where cylinders are required, handle on cylinder side must be mounted in down position, if vertical mounting is used.
- Thumbturn Operation** — Where thumbturn operations are required, handle on thumbturn side can only be mounted in horizontal position, or down position if vertical mounting is used.

How to order

Series	Functions	Handle	Finish	Handing
RSS: Mechanical lockset RES: Electrified lockset	Refer to page 05-11	PP-Push/Pull	630 - Stainless Steel	LH: Left Handed
				RH: Right Handed
				LHR: Left Hand Reverse
				RHR: Right Hand Reverse

Sample:





Marshall Best Security Corporation

www.marshallbestsecurity.com

13907 Parkside Drive, Suite B

Fishers, IN 46038

317-806-1180