MBS®

Alarm Locks

Table of Contents

Trilogy T2 Standalone Cylindrical Digital Pin Code Locks 4
Trilogy Audit Trail/PC-Programmable Pushbutton Locks. 5
Trilogy Prox Locks with HID Prox ID Card Readers 6
Trilogy Double-sided Pin Code and Pin/Prox Standalone Locks 7
Trilogy Networx Wireless 802.11/Ethernet Lock Access Systems 8-12
Trilogy Standalone Locks for Privacy and Special Application. 13
Trilogy High Securithy Standalone Mortise Locks 14
Trilogy Audit Trail and Programming Accessories, Finishes
and Ordering Information 15
TrilogyExit Adds Audit Trail and Auto Lock/Unlock to Panic Exits. 16
Trilogy Narrow Stile Trim for all Glass/Aluminum Doors and Panic Exit Doors. . 17-18
Matching Trilogy Digital Pin & Prox Access 12/24V Keypads with Audit Trail 19
Advanced Door Alarms 20
SirenLock Exit Alarms: Waterproof, Interior, and Delayed Egress 21
Remote Release Mag Locks, Powermags and RTES 22
Essential Add-ons and Extras. 23
Trilogy Family of Access Products Chart 24-25
K-12 and Campus Lockdown Solutions 26-27

Trilogy: The leading electronic access lock

Marshall Best Security is proud to partner with Alarm Lock for the wireless Networx systems. Trilogy®, Networx™, SirenLock™, LocDown™ are property of Alarm Lock, a division of Napco Security Technologies, Inc. and used with permission.

Trilogy®:

Retrofit Any Knobset

JDL2700 Trilogy® T2 Grade 1 standalone digital cylindrical keyless door lock, fingertip programmable - New Remote Release Retrofit Kit, too.

Page 4

Audit Trail

JDL2800/JDL3000 Trilogy audit trail cylindrical security locks with PC Programming & Schedules.

Page 5

ID Card Access

JDL3000 Trilogy HID® Reader/ Enroller Prox Lock with audit trail.

Page 6

+ New iClass/One-Card Model JPDL7100

Page 9

Vandalizm Protection

JPL3000 Prox-only vandal-proof lock

Page 6

Airport Jetway Use and more

JDL/JPDL5300 Dual-sided PIN/ prox lock with audit trail.

Page 7

Communicate Wirelessly

Trilogy Networx™ communicate wirelessly via Ethernet or 802.11 now including Networx Keypads & Controller plus Exit Trim. JDL/JPDL6100, JDL/JPDL6500, NET-DKPAK, NET-PDKPAK, NETPANEL, JETDLN/JETPDN

Pages 8, 9, 10 and 11

Restrooms/Classrooms

JDL/JPDL4100, JDL/JPDL4500 Trilogy Privacy/Lock Down Pushbutton -for restrooms, on-call rooms, file rooms, fitting rooms, classrooms

Page 13

High Security PIN/Prox ID

JDL3500, JPDL3500 Trilogy high security mortise locks and keyless gate locks with and without prox.

Page 14

Glass/Aluminum Doors

JDL1200, JDL1300, JPDL1300 Trilogy Narrow Stile Pushbutton aluminum door trim latch locks for PIN or Prox ID card access.

Page 17

Exit Doors

JETDL, JETPDL TrilogyExit retrofits existing exit bars and saves manpower on guard tours.

Page 16

All Trilogys feature no fee/license FREE Windows-based software

Access Keypads

JDK3000 & JJPDK3000 Trilogy Matching Weatherproof PIN/Prox. ID Access Keypads with audit trail

Page 19

Exit Doors

JDL1200, JDL/JPDL1300ET TrilogyExit keyfree convenience and greater security for panic exit devices on standard & narrow stile aluminum frame glass doors.

Page 16

Keyless access locks trusted by more leading retailers, firms, hospitals, schools & airports

Trilogy T2: Electronic cylindrical digital locks

Trilogy® T2 standalone digital cylindrical lock

JDL2700 Series

Our most popular lock - now with more codes & power!

- More codes: up to 100 3-6 digit codes: 1 master, 10 managers, 90 basic users, 3 one time service codes
- 5AA battery operated; 200,000 cycles, typical
- For outdoors, specify WP weatherproof models -31˚ to +151˚F (-35˚ to +66˚C)

ADA-compliant levers

Curved regal handle option for all Trilogys

Lever sets feature clutch mechanism ensuring longer life and complies with ADA specs providing barrier-free access to the disabled.

New! Retrofit Remote Release for Trilogy & Networx

Field-proven Trilogy® electronic standalone pushbutton locks available in cylindrical, mortise and trim models to retrofit with panic exit bars or narrow stile aluminum/glass doors' latch locks

Trilogys feature:

- In an hour, add dependable wireless access control, one door at time–easily retrofit standard knobsets
- Support 100 to 2000 PIN codes (3-6 digits); some with built-in HID prox readers for use with access ID cards/fobs
- Multi-level user codes & one-time service codes. Free passage, group- or total lock-out modes, too
- All are fingertip programmable at vandalproof all-metal keypad
- PC programmable models also feature printable audit trail, auto-lock/unlock scheduling saving guard/manpower costs.
- Longer-life battery operation–200,000 cycles typical (cylindrical models use 5AA off-the-shelf batteries); low battery alert
- Key override, standard core (supplied) or interchangeable core prep
- Non-handed cylindrical models
- Programmable relay function
- Durable GHMA Grade 1 cylindrical Lockset
- Weatherproof models -31˚ to +151˚F (-35˚ to +66˚C)
- Curved Regal handle option
- Choice of 3 Architectural finishes (US3 polished brass, 26D Satin chrome, 10B duronodic)

Retrofit Trilogys into Wireless Networx, too (see pg 10)



Ideal for receptionists.

Add Remote-Release convenience to any cylindrical Trilogy installation with keyfobs or desk-mounted button

- Easy & cost Effective
- Retrofits Cylindrical Trilogy Locks all the way back to 2000 (with a serviceable battery pack): **RR-TrilogyKit**
- For Networx Locks, too! Just purchase either the keyfob (shown above left) or desk-mount release button (pg 10)

Trilogy T3: Choice of audit trail pushbutton locks

T3 advanced digital lock with audit trail

JDL3200 Series

High Capacity Audit Trail Lock
New, enhanced version of the original JDL3000

- 2000 user codes (3-6 digits)
- Multilevel security - Master; manager; supervisor; basic users
- Program at keypad or with PC-and/or data-transfer module
- 40,000 event audit trail logs with time-/date-stamp of access by user; create PC reports or at hand-held wireless printer
- 500 scheduled lock/unlock events
- Quick passage mode (without being in program mode)
- Weatherproof models -31˚ to +151˚F (-35˚ to +66˚C)
- 5AA battery operated; 80,000 cycles, typical
- For outdoors, specify **WP** weatherproof models -31˚ to +151˚F (-35˚ to +66˚C)

JDL3000 Series

Original Audit Trail Trilogy, similar to above

- 300 multilevel user codes; 1600 event log
- 150 scheduled lock/unlock events
- For outdoors, specify **WP** weatherproof models -31˚ to +151˚F (-35˚ to +66˚C)

Trilogy economical audit trail lock

JDL2800

Cylindrical Lock

- 1000 event audit trail log, time-stamped by day, date, time and user
- 150 scheduled automatic lock/unlock events, etc.
- 200 user codes: Master, manager, supervisor and basic users. Also one-time service code (3-6 digits)
- Weatherproof models -31˚ to +151˚F (-35˚ to +66˚C)
- 5AA battery operated; 80,000 cycles, typical

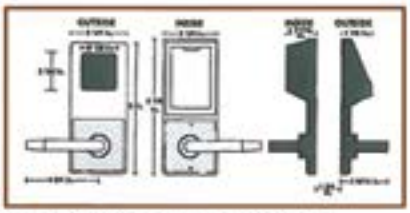

Trilogy cylindrical locks retrofit standard knobsets simply, in about an hour

Prox ID card support: With Trilogy durability

Trilogy prox lock with audit trail

JPDL3000

PIN/Prox Cylindrical

- Use the same ID cards as hardwired access systems & install in an hour
- Save all the downtime and 1/2 the cost of hardwired systems
- Provide access for up to 2000 users, with prox ID-cards or 3 to 6 digit codes including: Master, manager, supervisor and basic user. Users are individually programmed to use a card only, code only, or, for the highest security, both card and code.
- Built-in HID Prox reader for entry with HID125KZ prox ID cards and keyfob credentials
- Grade 1 BHMA Certified durability and rugged clutch mechanism ensure long dependable life
- Weatherproof performance for indoor and outdoor application, wide operating temperature range of -31˚ to +151˚F (-35˚ to +66˚C)
- Electronic master key system with access customized to each user's hours - Give each user access to common areas and/or their individual area(s) and do so defined by the actual times they are permitted entry there.
- Tap and Add batch ID card enrollment mode at lock or download from a PC
- 40,000 event audit trail; 500 scheduled events
- PC programming/reporting
- Quick passage mode
- 5AA battery operated; 60,000 cycles, typical

For iClass Prox Locks with 13.56 MHz support for one-card solutions - also see JPDL7100 pg 10

JPDL3000K

PIN only Cylindrical

- Keypad-less version of above for ultimate vandal-proofness in harshest environments
- Accepts HID prox cards and keyfobs for access
- Easy Tap & Add batch ID card enrollment mode allows many cards to be quickly added without PC -also- downloadable from PC or enroller, too
- 40,000 event audit trail log; 500 scheduled events
- PC programming/reporting

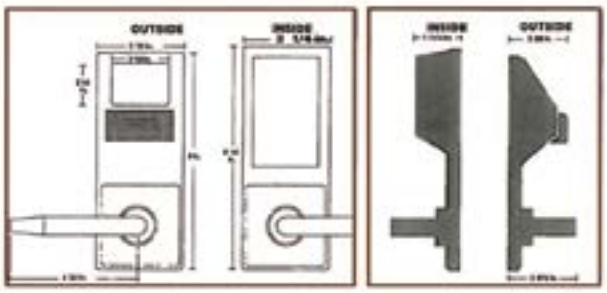

Double Sided: Access on both sides of the door

A favorite solution for airport jetways!

Double-sided Trilogy for keypad PIN-code access on two sides of door

JDL5200

PIN/Prox Cylindrical

- Incorporates all of the important features of JDL2700 (T2) into a double-sided lock
- Easy to add, delete, change users at the keypad
- Programming user codes on one side of the door works both sides, cutting your time & labor in half
- Ideal for community pool gates, courtyard gates, airport jetway doors, interrogation rooms, psych wards
- Comes with LED & audible entry indicators
- 100 user codes (3-6 digit codes)
- Standard prep & IC models available
- Weatherproof -31˚ to +151˚F (-35˚ to +66˚C)
- 5AA battery operated; 80,000 cycles, typical

JDL5300/JPDL5300

- 2000 user codes (3-6 digits) and/or accepts HID prox cards and Keyfobs (prox model JPDL5300)
- Direction-specific access assignable per user programmable access for each user for one or both sides of the door
- Up to 40,000 event audit trail log, time-stamped by day, date, time and user (PC or data module reportable)
- 500 scheduled events, including 4 quick schedules
- 4 programming levels, 4 user groups
- Data port for programming lock and querying audit trail is on primary side of door, along with functioning mechanical key override

Note: Key override operates latch only from primary side.

JPDL5300 model features 2 built-in HID prox card ID readers on both sides.

Trilogy Networx: Wireless networking locks

networx
by Trilogy

Wireless Trilogy Networx™ Locks supports 802.11 or ethernet

JDL6100 & prox/PIN version JPDL6100

Trilogy Networx Locks eliminate door-to-door programming and audit trail retrieval by communicating wirelessly via Ethernet or 802.11B/G, while providing all original Trilogy standalone lock's functionality. They provide a quick, easy, economical access system with advanced features & functions, like automatic schedules, event logs and support for 2000 doors and 5000 existing Prox ID Cards/Badges, but wih no wires to run, and no access panels or power supplies to buy or install. At its simplest it's one Grade 1 durable wireless lock per door, installed in about an hour, all communicating to a single Gateway (each gateway controls up to 63 locks), networked to any non-dedicated Windows-based PC. In addition to Wireless Trilogy Networx' usnurpassed battery-life, exceeding 5 years, they feature new network-wide capabilities, executed from any lock or the network's PC, including emergency priority global lockdown deployed in seconds, and you can activate (non-priority) system-wide free-passage or locking modes from the PC. For existing Trilogy installations, original standalone and new Trilogy Networx locks can seamlessly share one common database hosted on free Alarm Lock DL-WINDOWS software.

- **Trilogy Networx Locks communicate wirelessly via Ethernet or 802.11B/G** for a comprehensive wireless networked door access control system, eliminating door-to-door programming and audit trail retrieval and providing all standalone Trilogy lock functionality plus new network-wide and emergency lockdown features
- **Unsurpassed 5-year+ battery life, typical,** (Automatic battery status reports at the PC; visual and audible low-battery status indicators at lock(s).
- **Trilogy Networx and gateway modules have an integral transceiver for highly-efficient 900MHz bidirectional communications,** for longer range and less interference than with more common 2.4GHz spread spectrum devices. Alarm Lock devices require NO wiring; NO splitters or repeaters; NO hardwiring to the host/server; NO extra power supplies; and NO access controller/panels.
- **In 10 seconds, activate emergency global lockdown from the Networx PC or any Networx lock.** (This priority emergency command is lightning-fast system-wide and supercedes all scheduled programs or updates, etc. However, if desired, locks may be selectively programmed to be excluded from emergency global lockdown function, i.e., they will ignore the command.)
- **System-wide free-passage enable or disable,** can likewise be activated from the Networx PC
- **Locks support up to 5000 users with 3-6 digit numeric PIN codes and JPDL-Series also support prox ID card users** (virtually all HID™ format proximity technology ID cards, fobs, credentials.)

- **On demand, in seconds, wirelessly change users, schedules, lock features or retrieve audit trails of up to 40,000 events/lock from any networked PC.** (Note: Transaction processing time is dependent upon system capacity, the more locks/gateways and the more data to be up/down loaded, the longer the time.)
- **Unattended programming updates or event log retrievals can be scheduled** to run automatically, saving manpower and productive time.
- **Seamless upgrade path for original Trilogy users:** Intermix with existing Trilogy standalone lock installations and share on database and familiar Trilogy lock and software functions: Trilogy Wireless Networx Locks seamlessly integrate in an existing Alarm Lock Trilogy standalone door access system and share the same single DL-WINDOWS database (requires v4.1.x or higher). Existing Trilogy users can easily add one wireless Networx Lock, or as many as two thousand, to an existing system seamlessly with no downtime.
- **Remote System Management:** VPN-connection/remote capability for accessing the Networx System and controlling up to all 2000 locks, with all the security and peace-of-mind of your IT network. (No special modems required.)
- Wireless locks are fully keypad programmable and can be up and functioning even before their wireless network is configured, so IT deparetments don't have to coordinate with physical security departments or locksmiths
- Free Alarm Lock DL-WINDOWS software doesn't require a dedicated computer or a special computer network or costlly server software licenses, it simply runs as a secure Microsoft Windows-based application, on any computer system (as basic as a desktop or laptop PC), a wired or wireless router, and a gateway module or on an internal LAN with static IP address (recommended). MS XP and Vista supported (v4.4.x or higher).
- Minimizing hardware & installation costs, a single gateway module can interface between the PC network and up to 63 Networx locks, with a range of up to 900' clear field range or up to 200' depending on building construction. At its maximum, a Trilogy Networx system can comprise up to 32 gateways for the networking of up to 2000 locks or access controlled doors.
- Wall- or ceiling-mountable, compact getweay modules are available in wireless/hardwired and wired-only versions (with Power Over Ethernet (POE) option). The hybrid model connects using either 802.11, Ethernet cable or 100Base-TX (using RJ45 Jack); the wired versions use an RJ-45 Ethernet cable. Networx communications support both wired Ethernet 10BaseT and wireless 802.11.
- For the fastest most reliable networked system, in discovery setup mode, the system will locate and DL-WINDOWS will display each lock's signal strength at each installed gateway, so you can select it and optimize reliable communications and eliminate guesswork.

Trilogy Networx Lock Specifications:

- Weatherproof locks for indoor/outdoor use with wide operating temperature range of -31˚ to +151˚F (-35˚ to +66˚C)
- Cylindrical models boast industrial strength BHMA Grade 1 durability and all models feature vandal-resistant all-metal keypad for PIN codes.
- JPDL6100 version, also has built in HID Prox. Reader.
- ADA-compliant leversets.
- Easy-to-install modified ANSI A115 Series door prep; easily and neatly retrofit standard cylindrical knobsets and mechanical standalone locks, in under an hour. Non-handed.
- 3 hour UL fire-rated deadlatch.
- Supports 1-5/8 to 1-17/8" door thickness; 2-3/4" backset (2-3/8" available.)
- Manual key override standard; most IC cores also supported on interchangeable core models.
- Wide choice of 3 Architectural finishes (US3 polished brass, 26D satin chrome, 10B duronodic) and IC core preps (6-7 pin).

Network Interface

INTERFACE: Ethernet 10Base-T or 100Base-TX (using RJ45 Jack)
PROTOCOLS: TCP/IP, UDP/IP, DHCP 802.11

Wireless Specifications

WIRELESS STANDARDS: IEEE 802.11b; 802.11g
FREQUENCY RANGE: 2.412 - 2.484 GHz
OUTPUT POWER: 14cBm + 1.5dBm/-1.0dBm
MAXIMUM RECEIVE LEVEL: -10dBm (with PER<8%)
DATA RATES WITH AUTOMATIC FALLBACK: 54Mbps - 1Mbps
RANGE: Up to 328 feet indoors
MODULATION TECHNIQUES: OFDM, DSSS, CCK, DQPSK, DBPSK, 64 QAM, 16 QAM
INTERFACE: Wireless 802.11b, 802.11g and 10/100 Ethernet
PROTOCOLS: TCP/IP, UDP/IP, DHCP

SECURITY
- IEEE 802.11 - PSK with AES Encryption 128-bit Encryption
- 128-bit AES Rijndael encryption

A.L. Radio Link
- 900 MHz GFSK, 50 channels, 10mW power output

VOLTAGE: 5-6 volts AC/DC
OPERATING TEMPERATURE: -20˚ to 60˚ C (-4˚ to 140˚ F)
STORAGE: -40˚ to 85˚ C (-40˚ to 185˚ F)
AVERAGE POWER CONSUMPTION:
- 1300 MW (WLAN mode; maximum data rate)
- 300 mW (WLAN mode; idle)
- 750 mW (Ethernet Mode)

PEAK SUPPLY CURRENT: 650 mA
INPUT VOLTAGE: 5-6 volts AC/DC
OPERATING TEMPERATURE: -31˚ to 151˚ F
STORAGE TEMPERATURE: -40˚ to 85˚ C (-40˚ to 185˚ F)

No network activity or bandwidth usage until user operates DL Windows software to send programming to or receive log data from locks. Exception, during e mergency lockdown command Gateways communicate through the network. Gateways will send less than 1000 bytes during emergency command.

Trilogy Networx: A wireless model for every application

More Network Models & Options:

JPDL6100 Cylindrical Trilogy® Networx™ PIN/Prox. Wireless Access Control Lock with built-in HID proximity ID card reader, full-metal digital keypad, integral bi-directional radio, 4-C cell batter-operated (batts. supplied), serial number ID card, standard format SCI keyway for manual key override, 4-7/8" ASA Strike (incldd).

JDL6100 Cylindrical Trilogy® Networx™ PIN-Code Wireless Access Control Lock, as above, with full-metal digital keypad only.

JPDL6500 Trilogy® Networx™ PIN/Prox. Wireless Access Control Mortise Lock with built in HID proximity ID card reader, full-metal digital keypad, integral bi-directional radio, 4-C cell battery-operated (batts. supplied), serial number ID card, standard format SCI keyway for manual key override, 4-7/8" ASA Strike (incldd).

JDL6500 Trilogy® Networx™ PIN-Code Wireless Access Control Lock, as above, with full-metal digital keypad only.

JPDL7100 Cylindrical Trilogy® Networx™ iClass™ Prox. Wireless Access Control Lock with built-in 13.56 MHz iClass HID proximity ID card reader/enroller, full-metal digital keypad, integral bi-directional radio, 4-C cell battery-operated (batts. supplied), serial number ID card, standard format SCI keyway for manual key override, 4-7/8" ASA Strike (incldd).

JPDL7500 Mortise version of above

ETDLN Trilogy Exit Clutch Mechanism insures long life and durability. Fingertip and/or Windows programmable, 2000 User Codes: Master, manager, supervisor and users, Real Time Clock for up to 35,000 Event Tim/Date-Stamped Audit Trail and Up to 500 Lock/Unlock Schedules (with Time Zone Support). Rugged 12-Button Metal Keypad, non-Handed; Fully Field Reversible. Adaptable to most major manufacturers of standard RIM and IC RIM Cylinder. Supports most panic exit devices, including Von Duprin, Corbin, Yale, Dorma, Arrow, Sargent, Precision and Cal Royal

ETPDN Networx Prox Trilogy Exit model for added convenience and security. Includes all of the features above plus: Accepts most HID Proximity cards and keyfobs; Users are individually programmed to use a card only, code only, or for highest security – both card and code. Prox card data can be added to software by uploading from lock, by using AL-PRE or entering directly from computer using DL-WINDOWS Networx software.

RR-4BKEYFOB Optional remote release keyfob (shown).

RR-1BUTTON Optional desk-mount version of above.

DL-WINDOWS
Free Alarm Lock Trilogy Microsoft Windows-based software application, v4.0.1 or higher, supports Trilogy Networx and Trilogy standalone locks, with single database. No-charge, downloadable online at www.alarmlock.com

AL-IM80211
Hardwire/Wireless Gateway Interface Module, with integral bi-directional radio interfaces Networx locks with PC network with hardwired Ethernet and wireless 802.11. Powered with Class2, 6VAC transformer (supplied). Supports up to 63 Networx Locks. Two antennas. Ceiling or wall mountable.

Add Networx Trilogy convenience, programming, flexibility, audit trail and wireless connectivity to panic exit devices from most major manufacturers

AL-IME Hardwire Gateway Interface Module, supports up to 63 Networx Locks, similar to above, but using hardwired connection to the network via RJ45 Ethernet cable. One antenna. Powered with Class 2, 6VAC transformer (supplied). Ceiling or wall mountable.

AL-IMEPOEP Hardwire Gateway Interface Module + POE, supports up to 63 Networx Locks, as above, but suing hardwired Ethernet and Power Over Ethernet (P.O.E). Connects directly to a network via Ethernet cable. One antenna. Ceiling or wall mountable.

Turn Standalone Trilogy Locks into Wireless Networx Locks with New Field Upgrade Kits for Standalone PIN or PIN/Prox Cylindrical or Mortise Models. Call for more info or go to http://www.alarmlock.com/networxupgradekits.html

Wireless Networx Keypads & NetPanel

NET-DKPAK & NET-PDKPAK

Trilogy Networx Wireless Keypads and NetPanel combine to provide the ideal wireless keypad solution for use with mag locks, strikes and electrified exit devices in a smart access system with advanced features & functions, like automatic schedules, event logs and support for 2000 doors and 5000 existing Prox. ID Cards/Badges. The Networx Panel communicates via a Networx Gateway networked to any Windows-based PC. Networx keypads seamlessly share one common database hosted on free Alarm Lock free software (along with Networx locks and standalone Trilogys, too). This cost effective system is very scalable, and up to 63 NetPanels, controlling up to 126 Networx Keypads (or Wiegand devices), can communicate to as little as one Alarm Lock Gateway. Two starter kits are available, NET-DPAK & NET-PDKPAK, each with a controller and keypad (Digital PIN or Prox, respectively). Additional keypads and NetPanels may also be purchased individually.

Advantages

- New Wireless Keypad solution - networked versions of popular Trilogy JDK/JPDK3000 Keypads
- Ideal for use with strikes, mags, electrified exit devices
- 5000 users with 3-6 digit PINs or HID® ID cards
- Save manpower - Bidirectional 802.11/ethernet network communications updates, users, time-schedules and audit trail queries — without ever going to the keypads

Versatile for indoors and outside; ideal for education, healthcare, government, airports, courts, municipalities, & retail

- Familiar Trilogy operation, programming, software and ruggedness
- NetPanel Controller supports 2 Networx key-pads and/or 2 Wiegand output readers/devices
- Key features: Global lockdown and passage from keypad or PC, schedules, 35,000 event log, door position status indicator, request-to-exit, door ajar/kick-in, remote release options.

Features

- Networx NetPanel supports up to 2 Networx wireless keypads and/or Wiegand-output readers and communicates wirelessly via Ethernet or 802.11B/G for a comprehensive wireless networked door access contrl system, eliminating door-to-door programming and audit trail retrieval and providing all standalone Trilogy lock functionality plus new network-wide global emergency lockdown/unlock commands
- Networx Keypads support up to 5000 users with 3-6 digit numeric PIN codes and NETJPDK-Series also support prox ID card users (virtually all HID format proximity technology ID cards, fobs, credentials.)
- System-wide free-passage enable to disable, can be activated from the keypad or the Networx PC
- On demand, in seconds, wirelessly change keypad users, schedules, features or retrieve 35,000 events from any networked PC.
- Ideal for use with mag locks, strikes and electrified exit/panic devices (EL-devices/eletrified latch retraction devices.)
- Free Alarm Lock DL-WINDOWS software doesn't require a dedicated computer or a special computer network or costly server software licenses, it simply runs as a secure Microsoft Windows-based application, on any computer system (as basic as a desktop or laptop PC), a wired or wireless router, and a gateway module or on an internal LAN with static IP address (recommended). MS XP and Vista supported (v4.01 or higher).
- Wall- or ceiling-mountable, compact Alarm Lock Networx Gateway Modules and are available in wireless/hardwired and wired-only versions (with Power Over Ethernet (POE) option). The hybrid model connects using either 802.11 or standard Ethernet cable; the wired versions use an RJ-45 Ethernet cable. Networx communications support both wired Ethernet 10BaseT and wireless 802.11. Networx Gateways' wireless coverage performance equals or surpasses that of 802.11, with each Gateway spanning up to 900' clear field range or 50,000 square feet of indoor coverage, typical***.
- Up to 50 wall- or ceiling-mountable, compact gateway modules can be used per account and are available in wireless/hardwired and wired-only versioins, (with Power Over Ethernet (POE) option). The hybrid model connects using either 802.11 or standard Ethernet cable; the wired versions use an RJ-45 Ethernet cable. Networx communications support both wired Ethernet 10BaseT and wireless 802.11.
- Up to 2000 NetPanels can be used per account to further expand system capabilities.

NETPANEL dedicated access panel Includes:

- Circuit board with onboard flash memory; 12V power supply, with transformer and rechargeable backup battery
- Inputs supporting two of any combination of NETDK or NETPDK keypads, PLUS up to two Wiegand devices
- Special "Two Door Mode" allows two keypads and/or two Wiegand devices to separately control two doors
- Two Form-C relays
- Inputs for door position contact to indicate the status of the door, open or closed;
- Onboard bi-directional Networx radio
- Wiegand interface, red LED, green LED, and sounder.

Wiegand Device Support

- The NetPanel's Wiegand inputs currently support all Wiegand output devices, that support the Data 0/ Data 1 communications protocal and are compatible with HID Prox credentials (including Wiegand keypads and combination units.)

Examples of Wiegand Devices Supported:

- HID Classic Swipe Wiegand Reader Model 310 (36-bit card format compatible).
- HID ProxPro with Keypad Modell 5355
- HES model JRF5910 Hybrid Electric Strike with HID125k reader

***Other formats may be accommodated for special orders. Ask your Alarm Lock Representative.

Ordering Info.

NETPDKPAK26D Complete 2-Door NetPanel System with 1 PDK wireless keypad with built in HID Prox Reader, 26D finish. ****Includes 12 volt power supply, onboard bidirectioinal radio, 4Ah/12V rechargeable backup batter and plug in AC transformer. (System requires use of one of the AL-IM Series Gateway Modules, separately purchased.)*

NETDKPAK26D Complete 2-Door NetPanel System with 1 DK wireless keypad, 26D finish. ****Includes 12 volt power supply, onboard bidirectional radio, 4Ah/12V rechargeable backup batter and plug in AC transformer. (System requires use of one of the AL-IM Series Gateway Modules, separately purchased.)*

NETJDK26D DK Wireless keypad only, 26D finish.

****Note: Special keypad finishes may also be available – your Alarm Lock Rep.)

NETPANEL Access Control Panel to be used with other approved Wiegand output readers. Includes 12 volt power supply, onboard bidirectional radio, 4Ah/12V rechargeable backup battery and plug in AC transformer.

DL-WINDOWS Free Alarm Lock Trilogy Microsoft Windows-based software application v.4.177 or higher, supports Trilogy Networx Wireless Keypads, Locks and Trilogy standalone locks, with single database. No-charge downloadable online at **www.alarmlock.com**

AL-IM80211 Hardwire/Wireless Gateway Interface Module, with integral bi-directional radio, interfaces Networx keypads/locks with PC network with hardwired Ethernet and wireless 802.11. Powered with Class 2, 6VAC transformer (supplied). Supports up to 63 Networx NetPanels. Two antennas. Ceiling or wall mountable.

AL-IME Hardwire Gateway Interface Module, supports up to 63 Networx NetPanels, similar to above, but using hardwired connection to the network via RJ45 Ethernet cable. One antenna. Powered with Class 2, 6 VAC transformer (supplied). Ceiling or wall mountable.

AL-IMEPOEP Hardwire Gateway Interface Module + POE, supports up to 63 Networx NetPanels, as above, but using hardwired Ethernet and Power Over Ethernet (P.O.E.). Connects directly to a network via Ethernet cable. One antenna. Ceiling or wall mountable.

***Note:* Battery life is directly proportionate to activations: users, door usage, program pudates and audit trail download. Expected 5 year+ battery consumption estimate assumes 2000 authorized users, 100 passes per day, 365 days per year; daily updates changing one user and downloading 200 logged events every day.

***Note:* Actual coverage is dependent upon building construction and mounting location of Gateway. Multiple AL-IM Series Gateways may be used for large coverage areas.

SIMPLE NETWORX WIRELESS KEYPAD SYSTEM

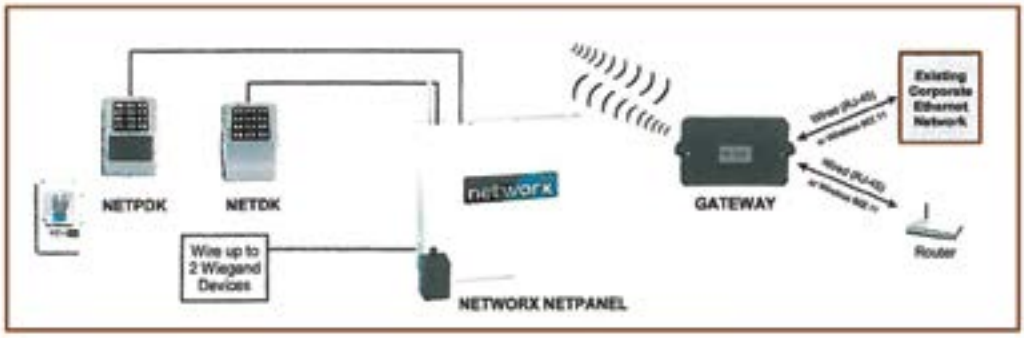

MAGNETIC LOCK AND/OR ELECTRIC DOOR STRIKE ONE OR TWO DOORS/ TWO KEYPADS AND/OR TWO WIEGAND DEVICES

The system is capable of controlling tow doors using up to two of any combination of NETDK or NETPDK keypads, PLUS up to two Wiegand devices. Two auxiliary Form-C relays are available for up to two of any combination of magnetic locks and/or electric door strikes.

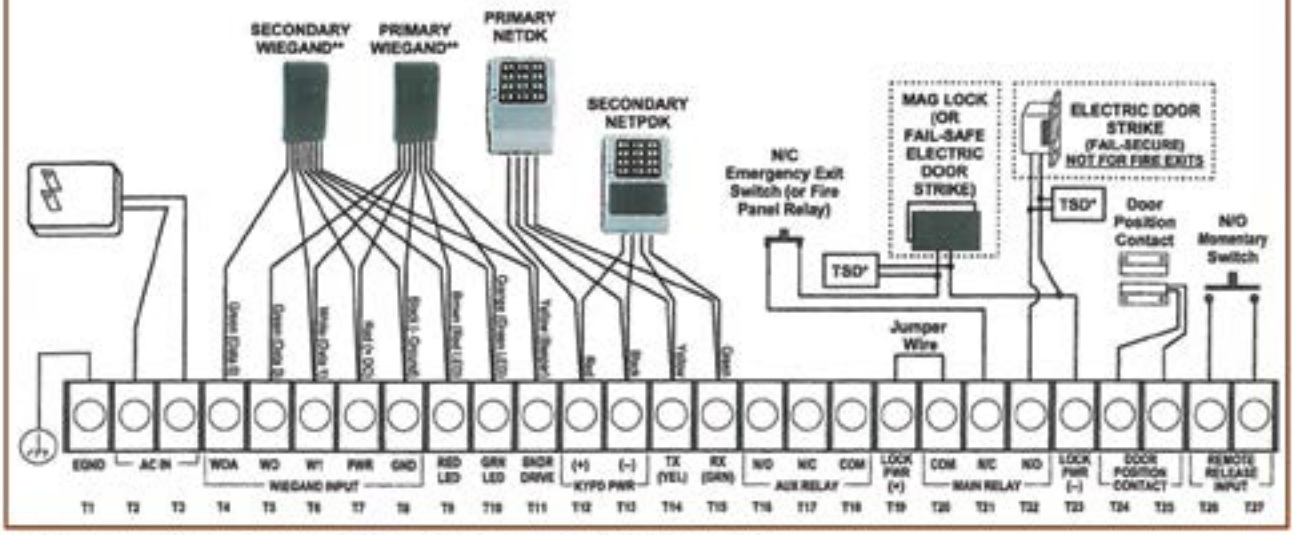

*TSD = Transient Suppression Device (two supplied): Mount the TSD as close to the device to be protected as possible.
**Example device shown: HID ProxPoint® Plus Model 6055B.

Trilogy J4100/J4500: Privacy & lock-down features

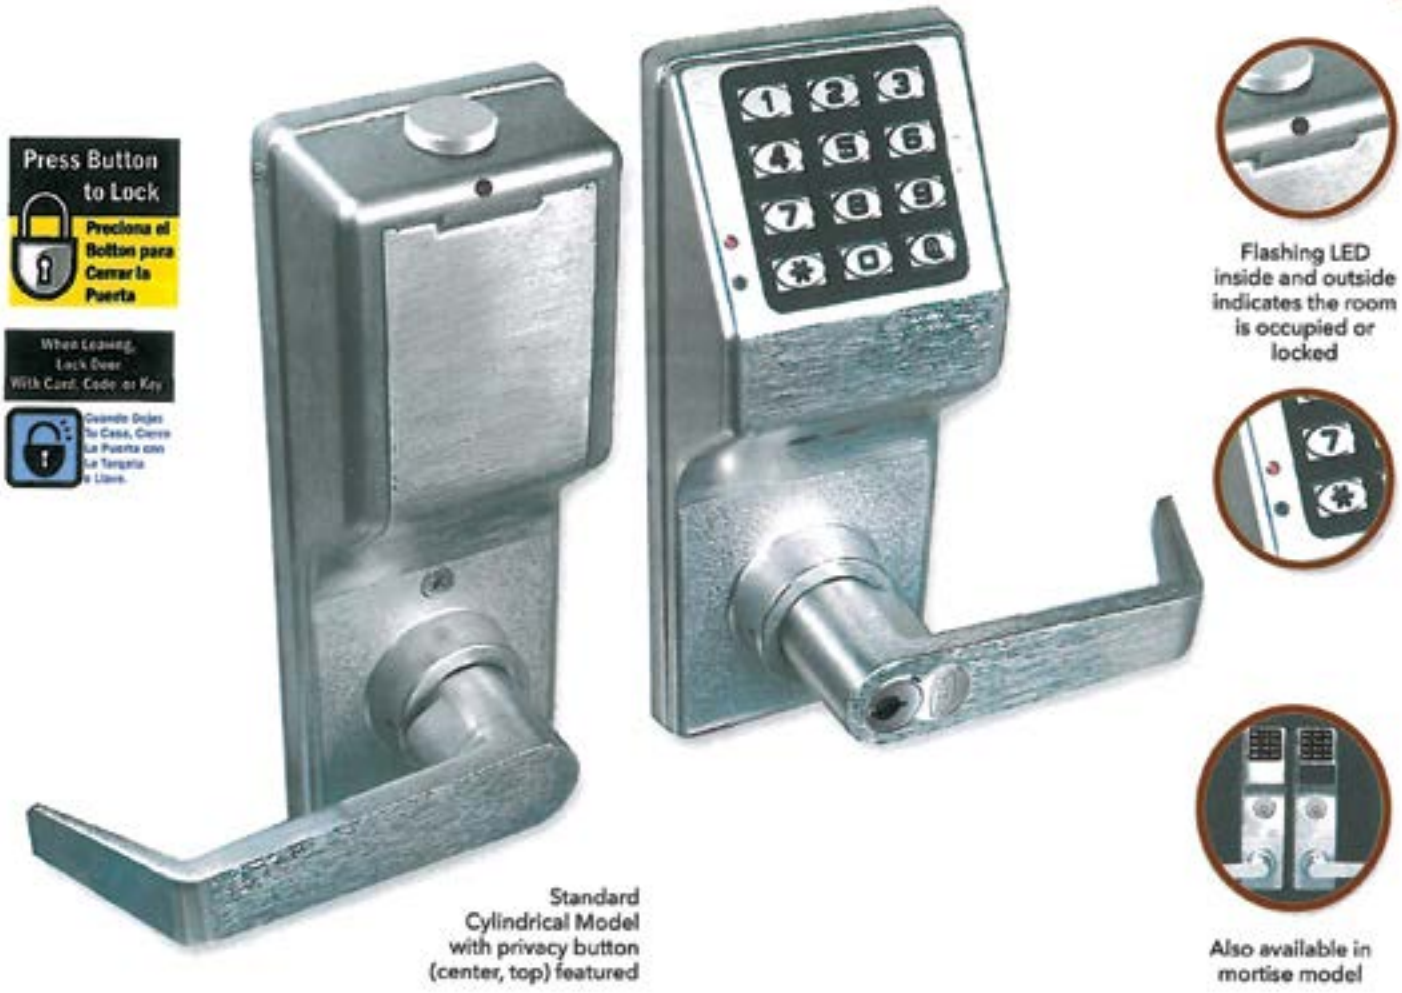

Standalone Trilogy® locks with privacy/lock down pushbutton on inner door (mortise & cylindrical pin or pin/prox models)

JDL4100 & Prox JPDL4100

Similar to the JDL3200 features plus:

- Interior LED on the inside housing indicates when the privacy session is active
- Rest assured knowing that you are safe within the room, while locking out unauthorized users.
- 2000 PIN or PIN/Prox user codes; 500 scheduled events; 40,000 audit trail
- Privacy Pushbutton – Push button on inside door to temporarily lock-out keypad codes (programmable option)
- Occupied and multi-status LED indicator, flashes when privacy session is active
- Self-stick instructional signage, supplied (bilingual)
- Keypad or PC programming/reporting
- Right- or left-hand, classroom or deadbolt function models
- 1-3/8" mortise cylinder & ASA strike, matching function supplied, only with J4500 Series
- 5AA battery-pak operated; 60,000 cycles, typical
- 3 Architectural finishes (US3 polished brass, 26D satin chrome, 10B duronodic)
  - Weatherproof -31˚ to + 151˚F (-35˚ to +66˚C)

Mortise JDL4500 and Prox Mortise JPDL4500 also available

School Lock-Down Applications: remain safely inside until the coast is clear – no need to open the door

At the first sign of trouble outside, with just one button and virtually no special training or knowledge required, faculty and/or students of all ages can simply press Trilogy's inside 'privacy' button to lock out unauthorized access, instantly locking-down a classroom or area, all while remaining safely within the room. There is no need to open the door, nor use a special key, since the fingertip-activated button is located on the inside door, i.e., the same side as classroom occupants. Trilogy's lockdown function automatically disables free passage through the door and even locks out general PIN user codes, since routine Trilogy keypad access is temporarily suspended whenever the privacy button is activated (even when the lock is time-scheduled for free-access mode).

Instantly, *a lock-down override code*, however, will reactivate the pushbutton keypad and enable authorized teachers/staff, outside the classroom, to readily bypass the lockout function at any time, should students, etc accidentally or purposefully activate lockdown mode. (In fact, all master and management codes (11) will permit instant access to the Trilogy protected area.)

For GLOBAL LOCKDOWN COMMANDS, activated from any lock or PC/server, also see NETWORX pgs 8-12

Trilogy Mortise: High security digital locks

Trilogy® high security mortise locks with and without prox ID readers

JDL3500 Series Mortise Locks

- 300 User codes: Master; manager; supervisor & basic users
- Fingertip or Windows PC-programmable
- Real time clock enables up to 500 scheduled events and holiday schedules
- 40,000 Event audit trail provides a printed time/date- stamped log of all electronic activity
- Long-life battery pak for 80,000 cycles, typical and low-battery alert
- Choose either classroom or deadbolt versions and left or right handing (If reverse hand is required, lock is field reversible.)
- 1 3/8" (3.5 cm) mortise cylinder supplied card enrollment mode allows many cards to be quickly added without PC -also- downloadable from PC or prox enroller tool
- 40,000 event audit trail log
- PC programming/reporting
- Quick passage mode (without being in program mode)
- Program data transferred to lock via AL-PCI2 or AL-DTMIII
- 5AA battery-pak operated; 75,000 cycles, typical
- 3 Architectural finishes (US3 polished brass, 26D satin chrome, 10B duronodic)
- Weatherproof -31˚ to + 151˚F (-35˚ to +66˚C)

JPDL3500 Series

JPDL3500 Series mortise lock with built in HID prox reader, similar to JDL3500 Series, but with:

- 2000 user codes (3-6 digits) and/or HID prox cards/fobs
- Multilevel security - Master; manager; supervisor; basic users
- Easy Tap & Add batch prox ID card enrollment mode allows many cards to be quickly added without PC -also- cownloadable from our prox enroller tool
- PC programming/reporting
- Quick passage mode (without being in program mode)
- Program data transferred to lock via AL-PCI2 or AL-DTMIII
- 5AA battery-pak operated; 75,000 cycles, typical
- 3 Architectural finishes (US3 polished brass, 26D satin chrome, 10B duronodic)
- Weatherproof -31˚ to + 151˚F (-35˚ to +66˚C)

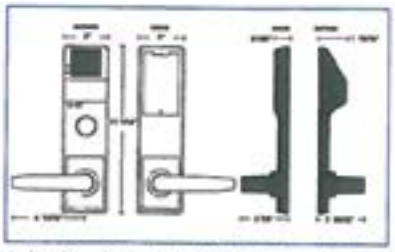

Cylindrical Models JDL4100 and Prox/PIN Lock JPDL4100 Versions also available

Trilogy audit trail and programming

AL-IR1 Infrared Printer

- Prints the event log and user code with hand-held convenience.

AL-DTMIII Data Transfer Module

- Module used to transfer program data from the PC to the lock and receive Audit Trail from the lock. Can transfer program data for up to 200 locks.

AL-PRE

- Alarm Lock Prox Reader/Enroller (For Use With Prox Lock) Prox Card Reader/Enroller Enables instant, automatic enrollment of Prox Cards into DL-Windows (just tap the Prox Card/fob device to the unit's faceplate to enroll)! Supports all prox cards and prox keyfobs. Simultaneous card enrollment, downloading or lock polling – all on just one serial port. Replaces AL-PCI. 9V Battery operation (6 mos. to 1 year, typical).

DL-WINDOWS SOFTWARE

- Windows-format software used to create programming, manager, users and schedules, receive audit trail from lock, program the lock using PC or laptop, program the AL-DTMIII to program multiple locks and configure the AL-DTMIII to transfer data.
- Free download at www.alarmlock.com

AL-PCI2 (not shown)

- Interface cable interconnects lock and PC for data transfer. (AL-PCI also includes DL-WINDOWS CD)

AL-PCI2U, (shown) as above, with USB interface cable

Choice of three Trilogy finishes

US3
Polished Brass

US26D
Satin Chrome

US10B
Duronodic

U.S. Handing options

00 Straight Lever

75 Regal Curved Lever

25 Turnpiece
50 Knob available on
DL1250/1350

Trilogy and Networx ordering information

Cylindrical Trilogys

JDL 27 00 WP IC /26D -Y

Model/Series:
JDL27 = JDL2700 Series
JDL28 = JDL2800 Series
JDL30 = JDL3000 Series
JDL32 = JDL3200 Series
JDL52 = JDL5300 Series
JPDL30 = JPDL3000 Series
JPDL53 = JPDL5300 Series
Networx Wireless:
JDL6100 PIN Series,
JPDL6100, 7100 PIN/Prox
Trim:
00 = Lever
75 = Regal Curved Lever
Exterior/Interior Use:
For Exterior use of JDL2700 & JDL3000 only, order WP for weatherproof use. All other models are weatherproof as standard.

Cylinder:
IC = Standard Interchangeable Core Prep for Best, Falcon, Arrow, KSP
(Note: No "IC" indicates standard K.G. cylinder.)
Finish:
/3 = US3 Polished Brass
/26D = US26D Satin Chrome
/10B = Duronodic (Special Order)
Special Order IC Prep:
-Y = Yale
-M = Medeco
-R = Sargent
-C = Corbin/Russwin
-S = Schlage

Mortise Trilogys

JDL 35 00 DB R /26D EX

Model & Series:
JDL35 = Trilogy T3 Mortise Series
Networx Wireless:
JDL6500 PIN, JPDL6500 PIN/Prox
Trim:
00 = Standard Lever
75 = Regal Curved Lever (US Spec Only)
Lock Body:
DB = Dead Bolt
CR = Class Room (U.S. Only)
Handing:

Your Door -	Order -
Left Handed	L
Right Handed	R
Left Hand Reverse Bevel	R
Right Hand Reverse Bevel	L

(Note: Trim is non-handed. Lock body is field reversible.)

Finish:
/3 = US3 Polished Brass
/26D = US26D Satin Chrome
/10B = Duronodic (Special Order)
European Model Suffix
Not Used For U.S. Models
*Note: Standard Lever for U.S. Models is Straight Lever. Standard Lever for European Models is Curved Tubular Lever

Trilogy Narrow Stile

JDL1200/26D1

Model Type
PDL = Prox/PIN
DL = Digital PIN
Trilogy Series
12 = 2700 Series
13 = 3000 Series
Trim
00 = Lever
25 = Turnpiece
50 = Knob
75 = Regal lever
Finish
/26D Satin Chrome
/10B Duronodic
/MS Metallic Silver
/MB Metallic Bronze

Mechanical Dead Latch
1 = Supports Adams Rite: 4710, 4730, 4900 Series
2 = Supports Adams Rite: 4070, MS18505, MS18505-050, MS1950, MS1950-050
3 = KIT Includes Adams Rite 4900 with 1-1/8" backset, 628 &313 faceplate
4 = KIT Includes Adams Rite 4900 with 1-1/2" backset, 628 & 313 faceplate

Trilogy Exit

ETJPDL- 1 R/ 26D V99

Type:
JPDL = Digital with Prox
JPL = Prox Only
JDL = No Prox
N = (suffix) Network Wireless
Door Thickness:
1 = 1 3/4" + 1/8"
2 = 2" to 2 3/4"
3 = 3" to 4"
Handle:
R = Regal
S = Straight

Finish:
/3 = US3 Polished Brass
/26D = US26D Satin Chrome
/10B = Duronodic (Special Order)
OEM Trim
V99 = Von Duprin 99
C50 = Corbin ED5000 & Yale
D93 = Dorma 9300
A38 = Arrow 3800
S88 = Old Style Sargent
N58 = New Style Sargent
P11 = Precision 1100

TrilogyExit: Add audit trail to panic exits

Add Trilogy convenience, programming, flexibility and audit trail to panic exit devices from most major manufacturers

OUTSIDE:
Rugged, field-proven Trilogy digital lock.

INSIDE:
Existing panic exit device – Most major brands suppported

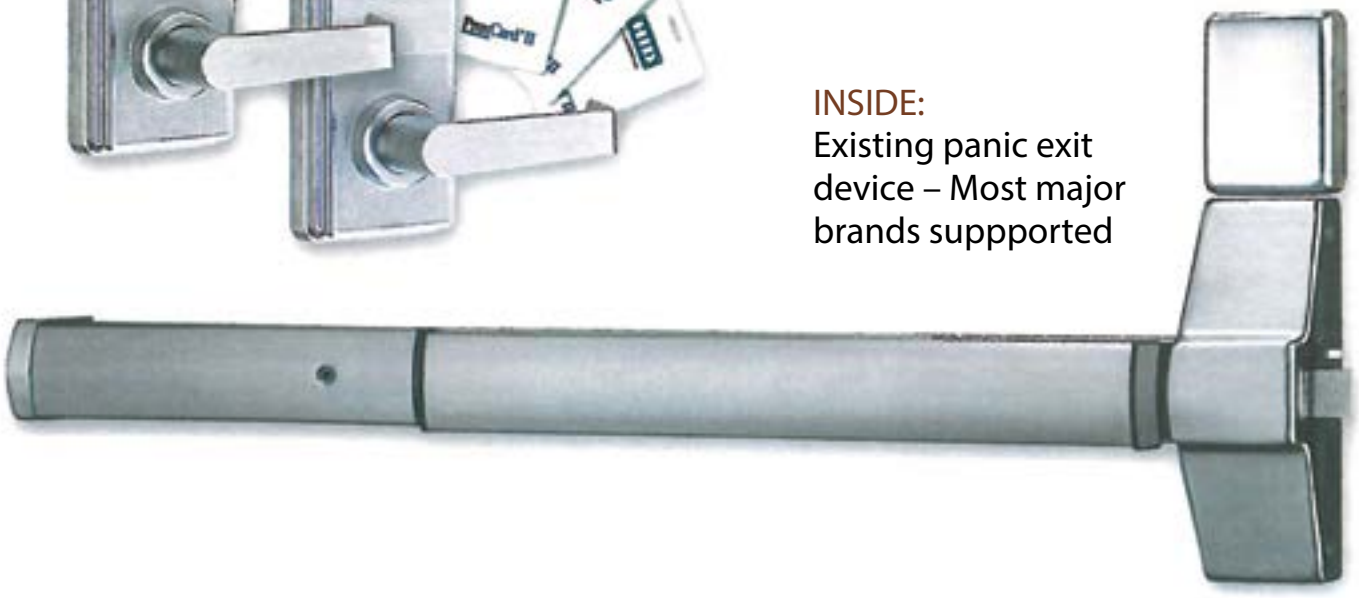

Add Trilogy convenience, programming, flexibility and audit trail to panic exit devices from most major manufacturers

TrilogyExit

- Clutch Mechanism insures long life and durability
- Fingertip and/or Windows Programmable
- 2000 user codes: Master, manager, supervisor and users
- Real Time Clock for up to 40,000 Event Time/Date-Stamped Audit Trail
- Up to 500 Lock/Unlock Schedules (with Time Zone Support)
- Rugged 12-Button Metal Keypad
- Non-Handed; Fully Field Reversible
- Adaptable to most major manufacturers of standard RIM and IC RIM Cylinders
- Supports most panic exit devices including: Von Duprin 99, Corbin ED5000 & Yal, Dorma 9300, Arrow 3800, Old Style Sargent, new Style Sargent, Precision 1100, Cal Royal 9800
- Battery operated; uses 5 AA batteries

Also available in prox model for added convenience and security. Includes all of the features just listed plus:

- Accepts most HID Proximity cards and keyfobs
- Users are individually programmed to use a card only, code only, or for highest security – both card and code
- Prox card data can be added to software by uploading from lock, by using AL-PRE or entering directly from computer using DL-WINDOWS software.

Also available in prox only model (JETPL)

Trilogy Narrow Stile: Glass door retrofit

Now get convenient keyless PIN code or Prox access anywhere there's a glass door.

Trilogy Narrow Stile lever models (left and right) designed to work with Adams Rite® latch series; Thumbturn models (shown at center) support swing & hook bolt products.

Plus, PC-programmable J1300 Series models provide audit trail log of door users.

Pushbutton aluminum door trim retrofit glass doors with latch locks

JDL1200, JDL1300

- Add keyless convenience to mechanical latch locks from Trilogy's all-metal, vandal-resistant 12-button keypad and/or automatic timed-scheduled locking/unlocking and audit trail with J1300 Series
- Aluminum door retrofit outside trim for Adams Rite® 1850, 1950, 4710, 4070, 4730, 4900 Series and MS1850S and MS1950S Series latch locks
- JDL1200 supports 100 3-5 digit PIN user codes, fingertip programmable
- JDL1300 (and Prox JPDL1300, right) support 2000 users, PC programming/reporting and features 40,000 event audit trail by user and 500 event schedule/real time clock (e.g. lock/unlock by time)
- Weatherproof -31˚ to + 151˚F (-35˚ to +66˚C)
- Long-life, battery-operated for 100,000 and 80,000 cycles respectively, typical on 2 lithium 3V batteries, supplied; low bettery alert
- Compact styling 14-3/8"H x 1-5/8"D x 1-3/4"W
- Key override mortise cylinder, 1-1/4" supplied. (Supports 1-1/8", 1-1/4" and 1-3/8"). Also interchangeable cores supported (Corbin/Russwin, Yale, Schlage, Medeco.)
- Backsets 31/32", 1-1/8" and 1-1/2"; stile thickness 1-3/4"
- Non-handed; fully field-reversible
- Four finishes US26D satin, 10B Durondic, MS metallic silver and MB metallic bronze

Narrow stile prox ID card PC-programmable model with audit trail

JPDL1300

Includes all of the J1300 Series features at left, plus:

- Built-in HID prox reader, supports up to 2000 users with HID Prox ID cards or/fobs or 3-6 digit PIN codes
- Easy Tap & Add batch prox ID card enrollment mode allows many cards to be quickly added without PC –also– downloadable from PC or prox enroller tool
- 40,000 event time-/date-stamped audit trail by user
- 500 event schedule/real time clock (e.g. lock/unlock by time)
- Long-life, battery-operated for 65,000 cycles, typical on 2 lithium 3V batteries, supplied; low bettery alert

Ideal for universities, hospitals, laboratories, airports, office

Narrow Stile Exit: For aluminum door retrofits

Add Trilogy convenience, programming, flexibility and audit trail to panic exit devices from most major manufacturers for narrow stile glass aluminum doors

OUTSIDE:
Add keyless access with Trilogy dependability

INSIDE:
Existing panic exit device – Most major brands supported

Alarm Lock's new Trilogy narrow stile exit device trim locks

JDL1200ET

- Adds vandal-resistant keyless access to panic exit doors
- Protects storefronts and managed properties 24/7
- 100 users supported (3-5 digit codes)
- Designed with all-metal, vandal-resistant 12-button keypads
- Supports 3-6 digit PIN codes and multilevel user hierarchy
- Easily installs on most aluminum glass doors
- Works with Jackson, Dor-O-Matic, Von Duprin (Von 33 LH (RHR) only), Dorma, Arrow, DCI & Corbin panic devices (Dor-O-Matic, jackson and Dorma devices require thumb-turn or knob *Note: Must purchase separate TP assembly – See price book*).

JDL/JPDL1300ET

As above but also equipped with ID card prox reader (PDL version), PC programming and automatic lock/unlock scheduling and time zone support

- 2000 Users (PIN code or prox ID on JPDL model)
- Two finishes 2 Architectural finishes (26D satin chrome, 10B duronidic)

Exit Devices TP Kits (Must order TP Kit separately)

- Jackson 1095
- Dor-O-Matic - 2090
- Von Duprin 22
- Von Duprin 33 LH (RHR) only
- Dorma - 5300
- Arrow - 1200/1300
- DCI - 5300
- Corbin - ED8200

Note: Certain manufactures' exit devices such as Jackson, Dor-O-Matic, DCI and others require a greater degree of rotation so a knob (50) or Thub Turn (25) is required to retract and project the latch. In this function, the latch will remain retracted until a PIN or Prox Card is represented project the latch creating a hold back feature. Please contact your local Alarm Lock representative for additional information.

Access keypads: 12/24V AC/DC with Trilogy features

Trilogy® weatherproof 12/24V AC/DC digital access keypads with PC programming & audit trail

Trilogy JDK3000

- 2000 PIN user codes, multilevel security
- Ideal for use with 12V or 24V (AC or DC) electric door strikes, mag locks or Alarm Lock Remote Release Mag Lock Kit (adjacent page)
- Wall mount or single gang box
- 2 High-Current Rated 8A Relays for entry, alarm zone shunting or lock release by real-time schedule
- Vandal-resistant, all metal 12-button keypad
- Keypad or PC programmable
- 40,000 Event audit trail report/print to PC or hand held printer or DTMIII Data Module
- Timed Egress Input – Selectable door open times 5, 10 or 15 seconds
- 500 Scheduled events & real time clock
- Tamper supervised (reportable to alarm system)
- Remote release feature; request-to-exit input
- Weatherproof -31˚ to + 151˚F (-35˚ to +66˚C)

Digital access keypad wityh prox reader

Trilogy JPDK3000

Same features as JDK3000 above, plus:

- Built-in HID proximity reader
- Accepts up to 2000 PIN codes and/or HID cards and keyfobs

For Wireless Keypad Solution, Ideal for use with Mags, Strikes and Electrified Exit Devices - Please also see Networx Keypad & NetPanel pgs 10-11

Door alarms: Advanced and multi-purpose

The PG21MS Series includes advanced narrow-stile microprocessor-controlled door alarms for surface mounting on a door or door frame. Typical applications include emergency fire excape doors, nursing home stairwell doors, rear restaurant and theater doors.

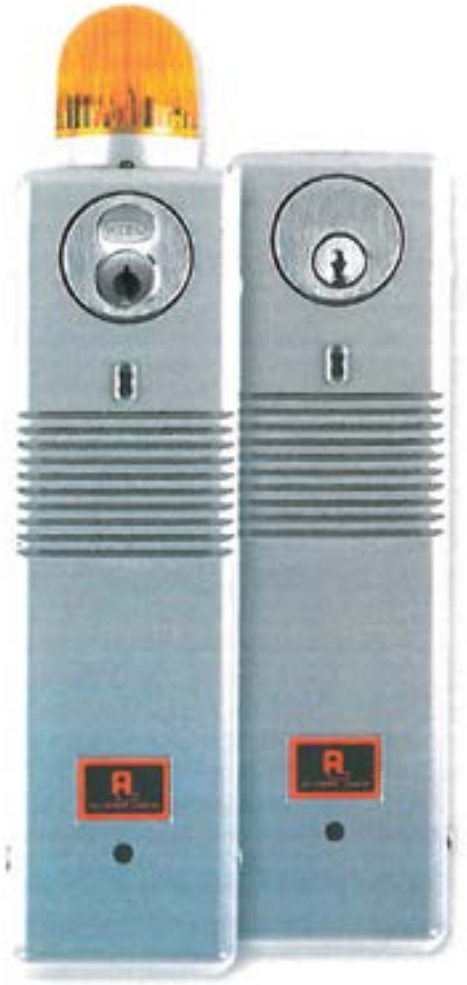

Models PG21MS/PG21MB

- Two selectable arming modes –
  1. **Always armed mode** – when key is turned counter clockwise to the disarm position, the key cannot be removed. To remove key, turn back to arm mode, thus keeping unit armed always.
  2. **Standard arming mode** – when key is inserted turning counter clockwise will disarm and key can be removed. Turning key clocksire will arem and key can be removed.
- Max-Flex Terminals, allowing for any or all of the following:
- Continuous power with the addition of an external power supply
- Multiple door monitoring permitted with built-in external reed switches
- Status Indicator – The LED will indicate RED when armed
- Entry Delay Time Options – include 15 seconds, 1 minute 15 seconds & 3 minutes 15 seconds
- Sleek model design key-activated door alarm for use on standard size and narrow stile doors
- Unauthorized use of door causes alarm to sound and activates LED indicator
- Options include continuous alarm, minute shutdown with auto reset and exit/entry delay
- Uses standard mortise cylinder (not included)
- Tamper switch supervised
- For exterior key control, optional RIM cylinder may be used
- Metallic silver or duronodic finish
- Relay option
- Optional Strobe unit (shown) – PG21MSS/PG21MBS units include a highly visible amber strobe will flash when unit goes into alarm

Model PG30KPD

Keypad-controlled narrow stile door alarm, similar to PG21, plus:

- Digital codes for master, management and passage (used for auto-arming)
- 3 security levels for:
  a) high security
  b) unattended applications
  c) flexible control for delivery doors, ets.
- Audible low battery warning
- 3 Programmable 95db siren styles: sweep, pulsed, and steady
- Logo Key is dual function test button

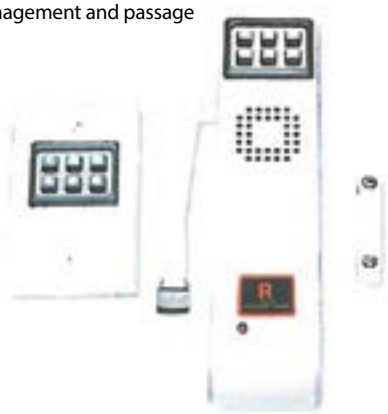

PG30KPD Accessory:

- For optional use with the PG30, this low-profile, brushed aluminum finished accessory provides all functions of the PG30 from the outside of the door. (Available in metallic silver only.)

Model PG10

Keypad-controlled narrow stile door alarm, similar to PG21, plus:

- The Pilfergard Model PG10 is an exit door alarm designed to deter the use of the secured door by sounding a twin action alarm when opened by unauthorized personnell. The alarm can be bypassed from inside or outside by the use of a key. (Requires standard mortise cylinder not supplied.) This durable surface mount unit is easily installed and is tamper-supervised with two separate tamper switches. Its test button verifies battery. Optional AC power supply available.

Model LL1

- All of the features of the PG10 unit with addition of a flashing strobe for easy alarm identification.
- Choice of system controllers

Sirenlock: Panic exit alarms

Sirenlock™ Models 250, 260, 700, and 710 are UL Listed panic alarm deadbolt devices which restrict unauthorized use of exit doors by sounding an alarm, while providing instant egress in emergencies

Delayed egress exit alarm

SIRENLOCK™ MODEL 715

- Offers stylish, cost-effective control of unauthorized use of exit doors
- 15 second delayed egress with instant 95db Dual Piezo alarm (meets UL specifications)
- Instant alarmed exit in case of actual emergency or fire (meets NFPA 1012 Life Safety Code)
- Easy-to-install, surface mount unit in a standard panic bar deadbolt/ deadlatch design
- Monitoring output for simultaneous use of CCTV camera, secondary siren, remote monitoring console, etc.
- Smoke detector input can be used to power existing system or standalone smoke detector(s) (Includes armored door cord and cables for wiring)
- 9V battery back-up powers in event of power failure
- Requires standard RIM cylinder (not included)

MODEL 11A (Not Shown)

(Dead bolt only; Not for ADA applications)

- Model 11A is an exit lock designed to control unauthorized use of emergency doors. It provides trouble free service and deters theft from within and outside. Unauthorized use sounds alarm which can only be reset or bypassed with key. Standard features include 1 inch throw deadbolt, warning alarm, outside cylinder capability, tamper switch and long life battery pack. Available for use with double doors or for use with existing panic bars. Optional AC power supply. Requires standard RIM cylinder (not included).

Clapper plate & full door exit style alarms

A – SIRENLOCK™ MODEL 250/260
B – SIRENLOCK™ MODEL 700/710

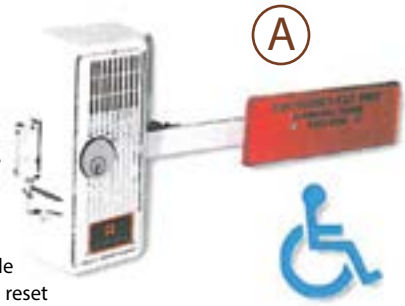

- Deadbolt and deadlatch meet relatching requirements
- Blaring 95db dual tone siren
- Selectable 2-minute alarm or constant alarm
- 9V battery powered and audible low battery warning
- Meets or exceeds UL, CFM, ADA, NYC housing requirements
- 260/710 Models have changeable 2 minute alarm cutoff or manual reset
- Models 700 and 710 are available in 33" and 48" versions
- Model 700 is also available in red finish (700XRD) and 312 (Duronotic)
- Non-handed surface installations on single or double doors
- Requires standard RIM cylinder (not included)

Waterproof electronic alarmed panic locks

700/710x28WP and 250/260x28WP (Models same as above)

- Suitable for outdoor use
- Weather-resistant for exposure to rain and precipitation, even in harsh . . . . . conditions
- Wide operating temperature of -20˚F to +140˚F (-29˚ to +60˚C)
- Powered with long-life sealed 9VDC alkaline battery pack (BP9)
- Loud 99 db alarm

Mags: Remote release mags, powermags & RTEs

Innovative remote release mag-kit

KIT RR-PM1200PAK

- Advanced 1200 lb. Electromagnetic Lock with Infrared Remote Release
- The power of a mag with the convenience of pocket-size remote controls for reception or staffers
- Complete turnkey system includes: Advanced 1200 lb. Mag, one remote control, and plug-in AC transformer
- Plug-in 12VAC transformer eliminates the requirement for pulling wires or the services of an electrician (optional use)
- Supports up to 100 individual remote controls (AL-REMOTE)
- Releases mag from either side of door
- AL-REMOTE Keyfob features single button operation with positive "click" response
- Automatically-enrolled by system in easy programming mode and is audibly and visually confirmed
- UL-listed; CE-listed

Easy buzz-in convenience from a mag lock. Ideal for reception areas!

Electromagnetic locks

PowerMag™ 12/24V

- Strong holding force of 600 and 1200 lb. models
- Perfect for both single and double doors and even sliding doors
- 5-year limited warranty
- Low voltage (12 or 24VDC); including field-selectable models
- Double door models with 1200 lb. locking per side (PM1200SLB1 and 40)

PowerExit™ Request-to-Exit Push Buttons

- Come in five models, with or without illuminated buttons
- All models have solid aluminum anodized finish US28
- Sizes: 3' x 4 3/4" x 1/4" and 1 5/8" x 4 3/4" x 1/4"
- Back Depth: 1 1/4" and 1 7/8"
- Switch Rating: 250V AC 5A
- Momentary Action

Electric door locks

Models 103 & 104RA

- Models 103 & 104RA are compact electric locks simple to install on all types of doors. The door is locked or unlocked by remote switch, key switch, time programmer or other electrical contact which interrupts the power. Model 103 is our standard fail-safe unit which projects the bolt only while power is on. When the power is off the bolt retracts. Model J104RA (reverse action) unlike our standard unit is "fail-secure" and will project the bolt only when the power is "off." When the power is on the bolt retracts. 24AC/DC and 12VAC/DC models available.

Alarm Lock: Essential add-ons and extras

Strikes for model 11A:

Model 210K

- Strike for single or double inswinging door(s) (not included with 11A

Model K24A

- Strike for single outswinging door (included with 11A)

Model K28

- Strike for double outswinging doors (not included with 11A)

Rim cylinder

Model CER

- Required for interior arming/disarming of models 11A, 80, 250, 260, 700, 710 & 715. Includes two keys (KA or KD)

Mortise cylinder

Model CEM

- Used with Pilfergard models PG10 and PG21/E to arm and disarm the alarm circuit. Includes two keys (KA 0r KD)

Cylinder finger pull

Model 711

- An inexpensive door pull for use when outside key only access is required.

Outside access door pull

Model 707

- For access from building exteriors. Installed on the outside of the door and linked to the lock. After deadbolt is retracted by outside key, a slight pull will release the deadlatch and open the door. 8" x 1 1/2". (For use with all models ecept Model 11A).

Battery eliminator

Model PP100

- For use with all PG10, PG21/E, PG30, 250, 700, 80, 260, 710 and 715 models. The PP100 conserves the battery which automatically takes over as the power source to sound the alarm in the event of a power failure or intentional cut-off. A built-in circuit breaker with push-button reset eliminates troublesome fuse replacements. Includes a cam lock cylinder and 6' of armored cable adequate to provide a door loop at the hinged-side of the door. Can be used with all 6V and 9V models.

Double door holder

Model 44

- The Double Door Holder secures the inactive door to the frame while the active door is closed. Releasing the active door automatically allows both doors to swing freely. Reversible, right or left hand doors. Cast aluminum 8 1/2" long, 3" wide and 2 1/2" high.

Armored door loop

Model 271

- For use with electrified locks. An easy means for bringing electric current from the hinge side of a door fram to the door. 18" flexible armored cable. End brackets are deep drawn anodized aluminum to conceal wire connections.

Single door strike

Models 730 & 725

- Model 730 supplied with models 250, 700 and 80
- Model 730M supplied with models 260, 710 and 80
- Model 725 supplied with model 715

Double door strike

Models 732 & 735

- Model 732 for use with models 250, 700 and 80
- Model 732M for use with models 260, 710
- Model 735 for use with model 715 (Not Shown)

Cable energy switch

Model 261

- Transfers current to other side of the door
- For use with models 250, 100 and 11A

Trilogy & Networx: Standalone and Wireless Access

MODEL/ FEATURE	JDL2700	JDL2800	JDL3600	JPDL3000	JDL3200	JDL3500	JPDL3500	JDL8180	JPDL8100	JDL4500	JPDL4500	JDL5200	JDL5300	JPDL5300	JDL6100	JPDL6100
Lock Type	Cylindrical	Cylindrical	Cylindrical	Cylindrical Prox	Cylindrical	Mortise	Mortise Prox	Cylindrical	Cylindrical Prox	Mortise	Mortise Prox	Cylindrical	Cylindrical	Cylindrical Prox	Cylindrical 802.11 Ethernet	Cylindrical Prox 802.11 Ethernet
User Codes	100	200	300	2000	2000	300	2000	2020	2060	2000	2000	100	2000	2000	5,000	5,000
Code Length	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits
Programming	Keypad only	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC	Keypad only	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC
Vandal Proof Keypad	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	Dual sides, All metal 12 button	Dual sides, All metal 12 button	Dual sides, All metal, 12 button	All metal, 12 button	All metal, 12 button
Trim w/Rugged Clutch	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever
Audit Trail Events		1000	1600	40000	40000	40000	40000	40000	40000	40000	40000		40000	40000	35,000	35,000
Scheduled events		150	150	500	500	500	500	500	500	500	500		500	500	500	500
Proximity Reader				Prox HID			Prox HID		Prox HID		Prox HID			Prox HID		Prox HID
Privacy Lockout								Privacy/ lockout	Privacy/ lockout	Privacy/ Lockout	Privacy/ lockout				Global lockdown	Global lockdown
Classroom/ Deadbolt						CR or DB	CR or DB			DB	DB					
Weather-proof -31 to 151° F	WP version	Standard	WP version	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
Handing	Nonhanded	Nonhanded	Nonhanded	Nonhanded	Nonhanded	Handed; Field Reversible	Handed; Field Reversible	Nonhanded	Nonhanded	Handed;	Handed	Nonhanded	Nonhanded	Nonhanded	Nonhanded	Nonhanded
Door Thickness	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8"	1-5/8 to 1-7/8"	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8"	1-5/8 to 1-7/8"	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8" others upon request	1-5/8 to 1-7/8" others upon request
Backset	2-3/4" (included); 2-3/8" option.	2-3/4" (included); 2-3/8" option.	2-3/4" (included); 2-3/8" option.	2-3/4" (included); 2-3/8" option.	2-3/4" (included); 2-3/8" option.	2-3/4" (included)	2-3/4" (included)	2-3/4" (included); 2-3/8" option.	2-3/4" (included); 2-3/8" option.	2-3/4" (included)	2-3/4" (included)	2-3/4" (included); 2-3/8" option	2-3/4" (included); 2-3/8" option	2-3/4" (included); 2-3/8" option	2-3/4" (included) 2-3/8" opt	2-3/4" (included) 2-3/8" opt
Cylinder	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyld.)	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyld.)	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyld.)	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyld.)	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyld.)	Generic mortise cylinder, supplied.	Generic mortise cylinder, supplied.	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyld.)	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyld.)	Generic mortise cylinder, supplied. Other sizes available for cylinders	Generic mortise cylinder, supplied. Other sizes available for cylinders	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyld.) One cyld needed for each side of door	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyld.) One cyld. needed for each side of door	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyld.) One needed for each side of door	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyld.)	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyld.)
Special Order Cylinders	Yale, Medeco, Sargent, Corbin/ Russwin, Schlage	Yale, Medeco, Sargent, Corbin/ Russwin, Schlage	Yale, Medeco, Sargent, Corbin/ Russwin, Schlage	Yale, Medeco, Sargent, Corbin/ Russwin, Schlage	Yale, Medeco, Sargent, Corbin/ Russwin, Schlage			Yale, Medeco, Sargent, Corbin/ Russwin, Schlage	Yale, Medeco, Sargent, Corbin/ Russwin, Schlage			Yale, Medeco, Sargent, Corbin/ Russwin, Schlage	Yale, Medeco, Sargent, Corbin/ Russwin, Schlage	Yale, Medeco, Sargent, Corbin/ Russwin, Schlage	Yale, Medeco, Sargent, Corbin/ Russwin, Schlage	Yale, Medeco, Sargent, Corbin/ Russwin, Schlage
Relay options	yes		yes	yes	yes	yes	yes	yes	yes	yes	yes	no	no	no	yes	yes
Battery/ Cycles Typical	SAA; 200000	SAA; 100000	SAA; 100000	SAA; 60000	SAA; 100000	SAA; 100000	SAA; 60000	SAA; 100000	SAA; 60000	SAA; 60000	SAA; 60000	SAA; 80,000	SAA; 100000	SAA; 60000	4 C cells 5 years 500,000	4 C cells 5 years 500,000
Ratings	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	3 Hr Fire Rated UL	3 Hr Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	3 Hr Fire Rated UL	3 Hr Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL
Architectural Finishes	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, 10B	US26D, 1

Control Locks & Special Application Models

JBL6500	JPDL6500	JPDLT100	JDL1200	JDL1300	JPDL1300	JETDL	JETPDL	JETDLN	JETPDN	JDL1200ET	JDL1300ET	JPDL1300ET	JDK3000	JPDK3000	NETDKPAK	NETPDKPAK
Mortise 802.11 Ethernet	Mortise Prox 802.11 Ethernet	Cylindrical Prox 802.11 Ethernet	Narrow Stile	Narrow Stile	Narrow Stile Prox	For use w/ panic device	For use w/ panic device ,Prox	For use w/ panic device 802.11 Ethernet	For use w/ panic device ,Prox, 802.11 Ethernet	Narrow Stile For use w/ panic device	Narrow Stile For use w/ panic device	Narrow Stile For use w/ panic device, Prox	Standalone Keypad	Standalone Keypad, Prox	Keypad 802.11 Ethernet	Keypad, Prox 802.11 Ethernet
5,000	5,000	5,000	100	2000	2000	2000	2000	2000	2000	100	2000	2000	2000	2000	5,000	5,000
3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-5 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits
Keypad /PC	Keypad /PC	Keypad /PC	Keypad	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC	Keypad	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC
All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button
Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever, thumbturn or knob	Straight or curved lever, thumbturn or knob	Straight or curved lever, thumbturn or knob	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever, thumbturn or knob	Straight or curved lever, thumbturn or knob	Straight or curved lever, thumbturn or knob			Straight or curved lever	Straight or curved lever
35,000	35,000	35,000		40000	40000	40000	40000	35,000	35,000		40000	40000	40000	40000	35,000	35,000
500	500	500		500	500	500	500	500	500		500	500	500	500	500	500
Prox MID	Prox MID	iClass HID Prox 13.56MHz			Prox MID		Prox MID		Prox MID			Prox MID		Prox MID		Prox MID
Global lockdown	Global lockdown	Global lockdown						Global lockdown	Global lockdown						Global lockdown	Global lockdown
Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
Handed, Field Reversible	Handed, Field Reversible	Nonhanded	Nonhanded	Nonhanded	Nonhanded	Nonhanded.	Nonhanded.	Nonhanded.	Nonhanded.	Nonhanded	Nonhanded	Nonhanded			Nonhanded	Nonhanded
1-5/8 to 1-7/8"	1-5/8 to 1-7/8"	1-5/8 to 1-7/8" others upon request	1-3/4"	1-3/4"	1-3/4"	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8" (others on request.)	1-3/4"	1-3/4"	1-3/4"			1-5/8 to 1-7/8" others upon request	1-5/8 to 1-7/8" others upon request
2-3/4" (included)	2-3/4" (included)	2-3/4" (included) 2-3/8" opt	31/32", 1-1/8", 1-1/2"	31/32", 1-1/8", 1-1/2"	31/32", 1-1/8", 1-1/2"					31/32", 1-1/8", 1-1/2"	31/32", 1-1/8", 1-1/2"	31/32", 1-1/8", 1-1/2"			2-3/4" (included) 2-3/8" opt	2-3/4" (included) 2-3/8" opt
Generic mortise cylinder, supplied	Generic mortise cylinder, supplied	Large key in knob, recbd or IC Prog for BestFalcon Arrow (w/o cyld.)	Generic 1-1/4" mortise cylinder, supplied 1-1/8", 1-1/4"1-3/8" supported	Generic 1-1/4" mortise cylinder, supplied 1-1/8", 1-1/4"1-3/8" supported	Generic 1-1/4" mortise cylinder, supplied 1-1/8", 1-1/4"1-3/8" supported	Generic Rim Cylinder, supplied. Other mfrs. Cylinder Adapters must be ordered separately	Generic Rim Cylinder, supplied. Other mfrs. Cylinder Adapters must be ordered separately	Generic Rim Cylinder, supplied. Other mfrs. Cylinder Adapters must be ordered separately	Generic Rim Cylinder, supplied. Other mfrs. Cylinder Adapters must be ordered separately	Generic 1-1/4" mortise cylinder, supplied 1-1/8", 1-1/4"1-3/8" supported	Generic 1-1/4" mortise cylinder, supplied 1-1/8", 1-1/4"1-3/8" supported	Generic 1-1/4" mortise cylinder, supplied 1-1/8", 1-1/4"1-3/8" supported			Large key in knob, recbd or IC Prog for BestFalcon Arrow (w/o cyld.)	Large key in knob, recbd or IC Prog for BestFalcon Arrow (w/o cyld.)
		Yale, Medeco, Sargent, Corbin/ Russwin, Schlage	Yale, Medeco, Corbin/ Russwin, Schlage	Yale, Medeco, Corbin/ Russwin, Schlage	Yale, Medeco, Corbin/ Russwin, Schlage					Yale, Medeco, Corbin/ Russwin, Schlage	Yale, Medeco, Corbin/ Russwin, Schlage	Yale, Medeco, Corbin/ Russwin, Schlage			Yale, Medeco, Sargent, Corbin/ Russwin, Schlage	Yale, Medeco, Sargent, Corbin/ Russwin, Schlage
yes	yes	yes				yes	yes	yes	yes				yes	yes	yes	yes
4 C cells 5 years 500,000	4 C cells 5 years 500,000	4 C cells 5 years 500,000	2-3V Lithium, 100,000	2-3V Lithium, 80,000	2-3V Lithium, 65,000	5AA; 60000	5AA; 60000	4 C cells 5 years 500,000	4 C cells 5 years 500,000	2-3V Lithium, 100,000	2-3V Lithium, 80,000	2-3V Lithium, 65,000			4 C cells 5 years 500,000	4 C cells 5 years 500,000
2 in Five Rated UL	2 in Five Rated UL	Shlitz Grade 1 Lockset, 3% Fire Rated UL											UL	UL	Pending	Pending
US26D, 10B	US26D, 10B	US26D, 10B	US10B, US26D, MS, MB	US10B, US26D, MS, MB	US10B, US26D, MS, MB	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US10B, US26D, MS, MB	US10B, US26D, MS, MB	US10B, US26D, MS, MB	US10B, US26D MS, MB	US10B, US26D, MS, MB	US26D, 10B	US26D, 10B

K-12 and Campus Security LocDown™ Solutions:

Everyone involved in schools, from parents, students and teachers to administrators and facility managers, are actively looking for expert solutions and actionable steps to secure their K-12 or college/university. And, you can be that expert provider. Better access control is one of the best steps you can offer and they can truly use today – right now.
Here are some of our tiered solutions for any application & budget.

Electronic Standalone Locking Solutions w/ Local Lock Down

Alarm Lock Trilogy JP/JDL 4100/4500 Series

- Simple push button locks door from inside, or use keyfob
- Activates small light indicators on front & back sides of door
- Includes bilingual signage on use and lock down
- Override option by authorized administrators
- No keys, key hassles; access controlled with ID card or digital code (over-ridden in lockdown emergency)
- 1 Hour installation. Can be field converted into Wireless Networx Locks later with kit (as below)
- Grade 1 Durable, Vandal-Resistant All Metal Locks, for inside & outdoors

Electronic Standalone Locking Solutions w/ Keyfob & Panic Button Lock Down

Trilogy Locks with Keyfob &/or Panic Option

- Rugged, easy to use and install electronic Trilogy locks add access convenience & quickly retrofit any lockset on virtually and door, inside or out.
- Easily add new keyfob or panic button option to most new & existing Trilogys (J3000 Series & above) and program to control "Lock Down" or "Remote Release" with one button.
- No keys, or liability from lost or misappropriated keys, or distribution hassles; access is controlled with ID card or digital PIN code
- 1 Hour installation. Can be field converted into Wireless Networx Locks later with kit (as below)

Wireless Network Locking Solutions w/ Global Lock Down

Trilogy® Nerworx™ JP/JDL6100, 6500, 7100 Series

Global Lockdown activated from the server or any individual access lock, in under 10 seconds

- Deploy wireless networked access locks in under an hour
- ID Card and/or Digital Code Access (PIN)
- Real-time global lockdown or unlock in under 10 seconds
- Scalable by door, area, building or across a campus of buildings, new & legacy
- Manage on-premises or remotely via web client or smart device– Control access, privileges, locks and doors, by time schedule, exception, etc.
- Grade 1 Durable, Unparalleled battery life, 5 years+

Small Access System w/ Global Lock Down

Networx NetPanel & Wireless Keypad Solution

Affordable Access System w/ Global Lock Down

- Supports up to 5,000 PIN-code or ID card users.
- Controls electric strike, Mag Lock or exit device with electric latch retraction (ex. narrow stile glass doors).
- Operates 1 or 2 Networx Keypads, PIN-code or PIN & Prox ID or supports standard Wiegand output Prox Readers.
- Inputs for Door-Positioin Switch and/or Remote Release
- Includes, rechargeable battery backup, 1.5amp power supply, & plug inAC transformer.
- Top features: Global lockdown and passage from keypad or PC; schedules; 35K event log, request-to-exit, door ajar/kick-in, etc.
- Kits with Networx keypads or NetPanel only

Marshall Best Security Corporation

www.marshallbestsecurity.com
13097 Parkside Drive, Suite B
Fishers, IN 46038
317-806-1180