




MARSHALL BEST SECURITY



HEAVY DUTY KEY SWITCH

Small Format Inter-changeable Core Cylinder



Marshall Best Security
13097 Parkside Dr., Suite B, Fishers, IN 46038
P:317-806-1180 F:317-578-2904
www.marshallbestsecurity.com



HEAVY DUTY KEY SWITCH

Small Format Inter-changeable Core Cylinder



MARSHALL BEST SECURITY



ICES67A1



SWITCH TYPE
SPDT
(Single pole – Double Throw)

SWITCH ACTION
Momentary
on-on

KEY ROTATION
36°
Clockwise-on

CONTACT RATING
10A 125vac, 10A 250vac
Resistive

FINISHES
BHMA 626, 613 & 606

PANEL MOUNT PREPARATION
Large Cam Lock Style
1-5/32" dia by .950" (flat width) Double "D" Design

ICES67B1



SWITCH TYPE
B1-SPDT
(Single pole – Double Throw)

SWITCH ACTION
Momentary on-on

KEY ROTATION
45° Clockwise-on

CONTACT RATING
15A 125vac, 15A 250vac
Resistive

FINISHES
BHMA 626, 613 & 606

PANEL MOUNT PREPARATION
Large Cam Lock Style
1-5/32" dia by .950" (flat width) Double "D" Design

ICES67B2



SWITCH TYPE
B2-SPDT
(Single pole – Double Throw)

SWITCH ACTION
Maintained
on-on

KEY ROTATION
360°
Clockwise-on

CONTACT RATING
15A 125vac, 15A 250vac
Resistive

FINISHES
BHMA 626, 613 & 606

PANEL MOUNT PREPARATION
Large Cam Lock Style
1-5/32" dia by .950" (flat width) Double "D" Design

ICES67D2



SWITCH TYPE
DPST
(Double pole – Single Throw)

SWITCH ACTION
Maintained
on-off

KEY ROTATION
25° Clockwise-on,
25° Counter Clockwise-off

CONTACT RATING
15A 125vac, 15A 250vac, DC30v 15A
Resistive

FINISHES
BHMA 626, 613 & 606

PANEL MOUNT PREPARATION
Large Cam Lock Style
1-5/32" dia by .950" (flat width) Double "D" Design

ICES67E2



SWITCH TYPE
TPDT
(Triple pole – Double Throw)

SWITCH ACTION
Maintained
on-center off-on

KEY ROTATION
30° Clockwise-on,
30° Counter Clockwise-on


CONTACT RATING
25A 125vac, 9A 250vac, 20A 30vdc
Resistive


FINISHES
BHMA 626, 613 & 606


PANEL MOUNT PREPARATION
Large Cam Lock Style
1-5/32" dia by .950" (flat width) Double "D" Design


HEAVY DUTY KEY SWITCH


Small Format Inter-changeable Core Cylinder



	SWITCH TYPE DPDT <small>(Double pole - Double Throw)</small>	SWITCH ACTION Momentary on-center off-on	KEY ROTATION 24° Clockwise-on, 24° Counter Clockwise-on
	CONTACT RATING 15A 125vac, 15A 250vac Resistive, Motor Load 400w 125vac		FINISHES BHMA 626, 613 & 606
	PANEL MOUNT PREPARATION Large Cam Lock Style 1-5/32" dia by .950" (flat width) Double "D" Design		

SWITCH TYPE SPDT <small>(Single pole - Double Throw)</small>	SWITCH ACTION Maintained on-on	KEY ROTATION 32° Clockwise-on, 32° Counter Clockwise-on	
FINISHES BHMA 626, 613 & 606	CONTACT RATING 15A 125vac, 6A 250vac, 20A 30vdc Resistive		
PANEL MOUNT PREPARATION Large Cam Lock Style 1-5/32" dia by .950" (flat width) Double "D" Design			

	SWITCH TYPE B3-SPDT <small>(Single pole - Double Throw)</small>	SWITCH ACTION Momentary on-on	KEY ROTATION 30° Clockwise-on
	CONTACT RATING 15A 125vac, 15A 250vac Resistive		FINISHES BHMA 626, 613 & 606
	PANEL MOUNT PREPARATION Large Cam Lock Style 1 5/32" dia by .950" (flat width) Double "D" Design MODEL: J-3 (2) SPDT Switches (Single Pole - Double Pole)		

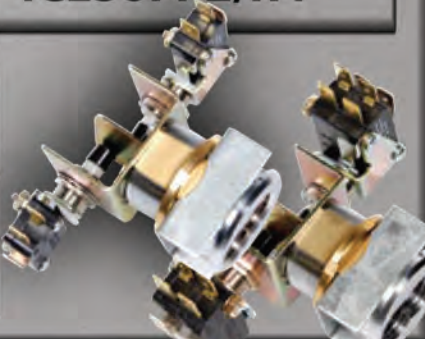SWITCH TYPE P2-(4) SPDT <small>(Single pole - Double Throw)</small>	SWITCH ACTION Momentary on-on	KEY ROTATION 30° Clockwise-on, 30° Counter Clockwise-on	
FINISHES BHMA 626, 613 & 606	CONTACT RATING 15A 125vac, 15A 250vac Resistive		
PANEL MOUNT PREPARATION Large Cam Lock Style 1 5/32" dia by .950" (flat width) Double "D" Design MODEL: R-4 (4) SPDT Switches (Single Pole - Double Pole)			

OPTIONS:

FACEPLATES



Narrow Faceplate
option 0

(for models A1,B1,B2,B3,D2,E2,J3,K4,L2, only)



Single Gang Faceplate
option 1



Double Gang Faceplate
with single switch
option 2

(for models A1,B1,B2,B3,D2,E2,J3,K4,L2, only)



Double Gang Faceplate
with double switch
option 3

(for models A1,B1,B2,B3,J3 only)

FINISHES

Satin Chrome
BHMA 626
option S

Oiled Rubbed Bronze
BHMA 613
option D

Satin Brass
BHMA 606
option B

FINISHES

RED (1)
12/24 volt, mounted
option R

GREEN (1)
12/24 volt, mounted
option G

RED (1) & GREEN (1)
12/24 volt, mounted
option T

SWITCH Action & function

MODEL

**SPDT
10 AMP
ON-ON**

**SPDT
15 AMP
ON-ON**

**DPDT
15 AMP
ON-ON**

**DPST
15 AMP
ON-OFF**

**3PDT
15 AMP
ON-OFF-ON**

**DPDT
15 AMP
ON-OFF-ON**

**SPDT
15 AMP
ON-OFF-ON**

ICES67A1

MONENTARY
DETENT ACTION
30 DEGREE
RIGHT ROTATION

ICES67B1

MONENTARY
DETENT ACTION
45 DEGREE
RIGHT ROTATION

ICES67B2

MAINTAINED
360 DEGREE
RIGHT ROTATION

ICES67B3

MONENTARY
SPRING ACTION
30 DEGREE
RIGHT ROTATION

ICES67J3

MONENTARY
SPRING ACTION
30 DEGREE
RIGHT ROTATION

ICES67D2

MAINTAINED
RIGHT / LEFT
TOGGLE ACTION

ICES67E2

MONENTARY
RIGHT / CTR / LEFT
TOGGLE ACTION

ICES67K4

MONENTARY
RIGHT / CTR / LEFT
TOGGLE ACTION

ICES67L2

MAINTAINED
RIGHT / LEFT
TOGGLE ACTION

ICES67P4

MONENTARY
SPRING ACTION
30 DEGREE
RIGHT / CTR / LEFT ROTATION

ICES67R4

MONENTARY
SPRING ACTION
30 DEGREE
RIGHT / CTR / LEFT ROTATION

FACEPLATE Switch & Configuration

MODEL	FACEPLATE			
	SINGLE SWITCH	SINGLE SWITCH	SINGLE SWITCH DOUBLE GANG SWITCH PLATE	DOUBLE SWITCH DOUBLE GANG SWITCH PLATE
	NARROW SWITCH PLATE	SINGLE GANG SWITCH PLATE		
ICES67A1	X	X	X	X
ICES67B1	X	X	X	X
ICES67B2	X	X	X	X
ICES67B3	X	X	X	X
ICES67J3	X	X	X	X
ICES67D2		X	X	
ICES67E2		X	X	
ICES67K4		X	X	
ICES67L2		X	X	
ICES67P4	----- PANEL ONLY -----			
ICES67R4	----- PANEL ONLY -----			

